
IMPACT ACOUSTIC®



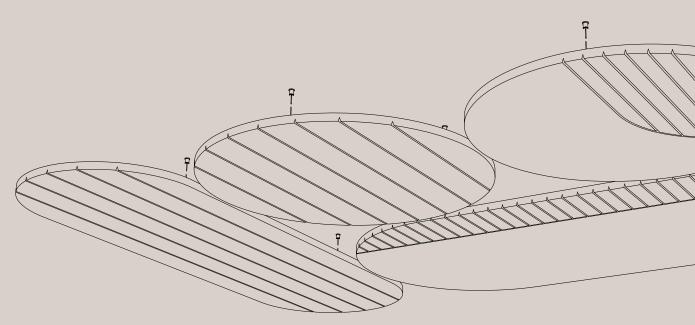


Vela Ceiling Panel

711.24.22.000.00

TECHNICAL DATA SHEET

Vela Ceiling Panel

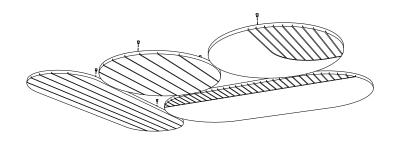

Article number


711.24.22.000.00

Dimensions

Length	1800mm	70.86"
Width	2400mm	94.48″
Thickness	24mm	0.94"

Information

incl. suspension kit

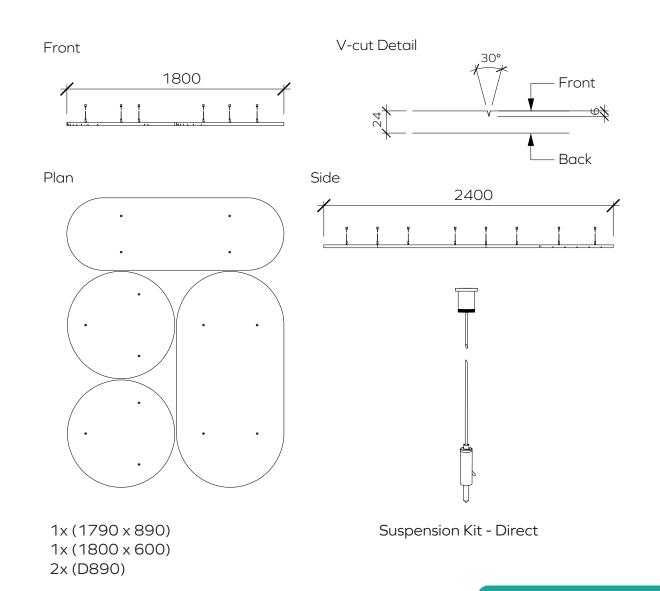





University of Stuttgart

Germany

Vela Ceiling Panel


Acoustic Technical Specifications

Vela Ceiling Panel 24mm

Frequency (Hz)	125	250	500	1000	2000	4000	
Vela Ceiling Panel 24mm (set of 4 Panels)	1.56	2.74	3.53	5.10	5.89	6.28	

Sound Absorption Coefficient (α s) according to EN ISO 354

Universität Stuttgart – Institut für Akustik und Bauphysik IABP

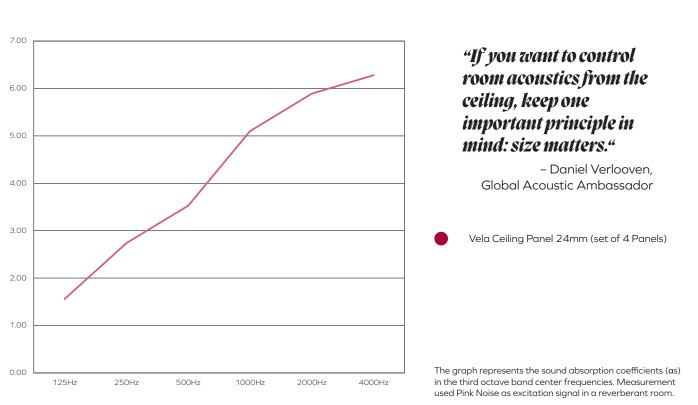

ARCHISONIC® Colours

Quiet Neutrals

12mm & 24 mm

These shades work in harmony with natural textural materials and soften industrial environments. From light to dark and cool to warm, these are the foundations of any scheme where longevity and a mood of calm is desired.

Warm Naturals

Combinations of lighter toned

neutrals and pinks have a gently

soothing and restorative effect

while the more saturated hues

make perfect environments for

12mm & 24 mm

relaxation.



ARCHISONIC® Colours

Living Greens 12mm & 24 mm

From the cool greens of forests to the yellowed aspect of young wheat, we see Living Greens breathing life into indoor spaces, and an essential palette for the future. Use in tonal layers brings the depth and diversity of green, while a single note can provide an amplifying backdrop to a biophilic space.



Spearmint 706



Nordic Pine 311

Elemental Blues 12mm & 24 mm

These blues work perfectly both as familiar single hues and in effortless tonal layers to create an immersive environment for focus or resto-

ration.





Pacific Ocean 432

IMPACT ACOUSTIC[®] Bodenhof 4, 6014 Luzern (Switzerland)













439





HABITAT MATTER


habitatmatter.com spec@habitatmatter.com

ARCHISONIC® Colours

Soothing Pastels

12mm & 24 mm

With tonal duos of pink and blue and green, this perfectly balanced group is designed for peaceful plays on light and shade and playful contrast. While the lightest tones have a dreamlike quality, their deeper counterparts add a subtle grounding.

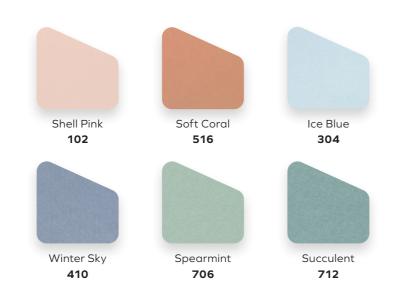

ARCHISONIC® Colours

Energetic Brights 12mm & 24 mm

There are no rules here with endless possibilities for clashing contrasts or surprising highlights. For a sophisti-cated use of energetic colour, take a single hue and colour match contrasting textiles and solid surfaces.



Pacific Ocean 432



Electric Orange 464

Elegant Darks

12mm & 24 mm

While colour can create a mood, it is the depth or lightness of a hue that truly defines the emotion. While each hue has the strength to stand alone, beautiful effects can be achieved with harmonized pairs.



311



810



550



The primary story happens when all three main colours are used together, with varied proportions creating differing moods. As with the Energetic Brights palette, combine with coordinating-coloured textiles and solid surfaces.



Snow White 500



Poster Red 662









140

Charcoal 542



864



846



HABITAT MATTER habitatmatter.com spec@habitatmatter.com

ARCHISONIC® Material

Composition

100% PET (60% certified post-consumer content)

Material Reutilisation

24mm 88 PET bottles/m² 12mm 53 PET bottles/m²

Density

24mm $4000 \,\mathrm{g/m^2}(+/-10\%)$

12mm 2400 g/m² (+/-10%)

Dimensions Raw Panels

24mm 1800 x 2400 x 24mm 70" x 94" x 0.94" (+/-7%)

12mm 1200 x 2800 x 12mm 47" x 110" x 0.47" (+/-7%)

Fire Test

B-s1, d0 DIN EN 13501-1

Class A ASTM E84

VOC Emission

A+ 28 Days French Regulation Pass 14 Days CDPH/EHLB



Care Instructions

PET fibres do not provide a breeding ground for bacteria and other germs. The dyed-through fibres do not bleach out even when using aggressive cleaning agents and disinfectants. Alcohols, aldehydes or active chlorine can be used for cleaning.

For daily cleaning we recommend alcohol solution (75%), e.g. Pantasept. In case of contamination by dust or fluff, use feather duster or a regular vacuum cleaner. For heavy dirt, treat the material with hydrogen peroxide.



ARCHISONIC® Impact Acoustic AG

Final Assembly: Lucerne, Switzerland Life Expectancy: 30 Year(s) End of Life Options: Salvageable/Reusable in its Entirety, Take Back Program, Recyclable (98.5%) Ingredients:

PET: Polyethylene Terephthalate; Phosphorus flame retardant: Phosphorus; N, N'-Ethylene bis(stearamide): Octadecanan N,N'-1,2-ethanediylbis-; Stearic acid: Stearic Acid; Titanium dioxide: Titanium dioxide

Living Building Challenge Criteria: Compliant

I-13 Red List: LBC Red List Free Declared

% Disclosed: 100% at 100ppm LBC Red List Approved VOC Content: Not Applicable

I-10 Interior Performance: CDPH Standard Method v1.2-2017 I-14 Responsible Sourcing: Not Applicable

IMA-0001 EXP. 01 AUG 2023 Original Issue Date: 2022

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACT INTERNATIONAL LIVING FUTURE INSTITUTE[™] living-future.org/declare



ΗΑΒΙΤΑΤ MATTER

habitatmatter.com spec@habitatmatter.com



M A T T E R habitatmatter.com spec@habitatmatter.com



connect@impactacoustic.com | www.impactacoustic.swiss