
IMPACT ACOUSTIC®



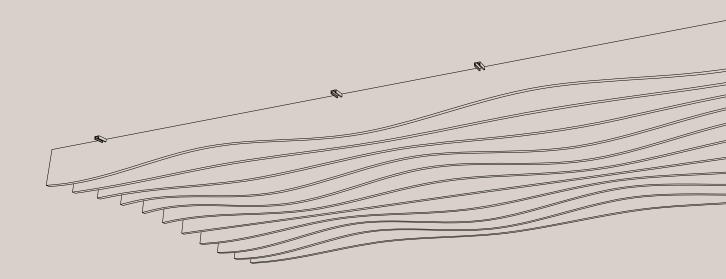

Wave Sine Bespoke Ceiling Baffle

713.24.11.000.00 713.24.31.000.00

Wave Sine Bespoke

Ceiling Baffle

Article number

713.24.11.000.00

Dimensions

Height 150-250mm 5.90"-9.84"


Baffle Distance 200mm 7.87" Thickness 24mm 0.94"




incl. 1 design revision and suspension profiles



spec@habitatmatter.com

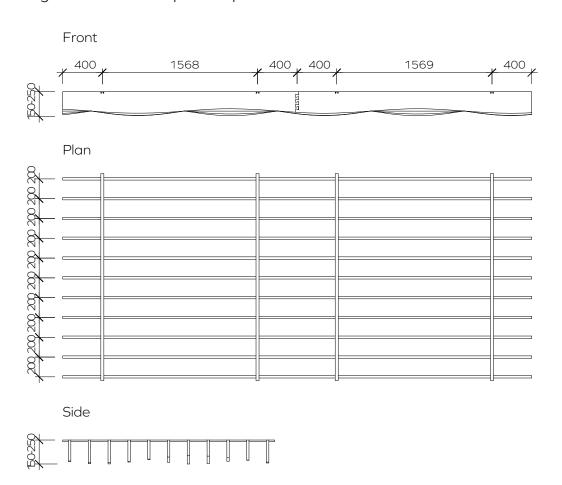

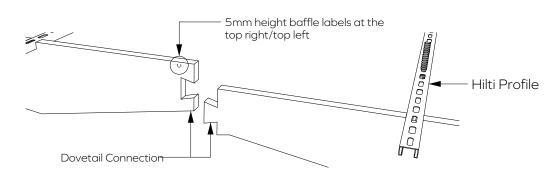

Wave Sine Bespoke

Ceiling Baffle

Article number

713.24.31.000.00

Dimensions

 Height
 150-250mm
 5.90"-9.84"


 Baffle Distance
 300mm
 11.81"


 Thickness
 24mm
 0.94"

HABITAT MATTER habitatmatter.com spec@habitatmatter.com

Information

incl. 1 design revision and suspension profiles

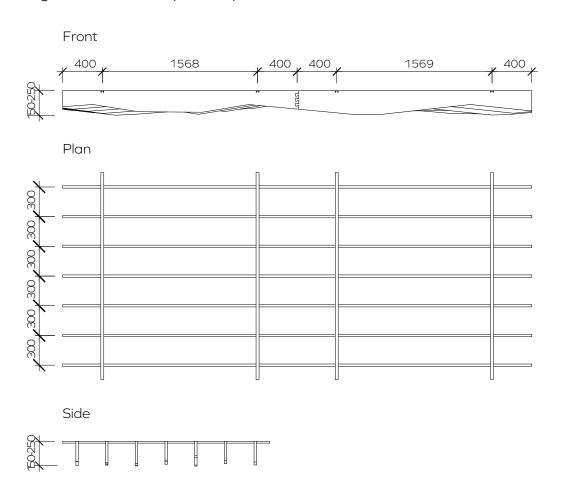

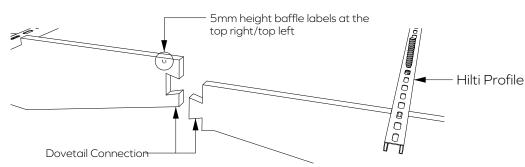



Wave Sine Bespoke

Ceiling Baffle


Acoustic Technical Specifications

Bespoke Ceiling Baffle 24mm

Frequency (Hz)	125	250	500	1000	2000	4000
Ceiling Baffle 24mm (20mm cavity)	0.20	0.45	0.60	0.95	1.35	1.45

Sound Absorption Coefficient (αs) according to EN ISO 354

Universität Stuttgart – Institut für Akustik und Bauphysik IABP

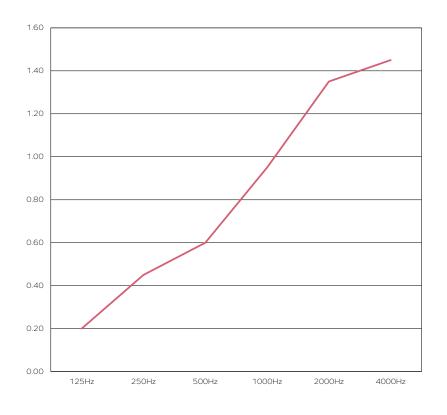



"Baffles guarantee the best absorption and diffusion of all sound waves if you consider a spacing of 20cm in between the fins. But don't bring your surfboard to the office thinking you can rule those waves."

– Daniel Verlooven, Global Acoustic Ambassador

Ceiling Baffle 24mm (20mm cavity)

The graph represents the sound absorption coefficients (as) in the third octave band center frequencies. Measurement used Pink Noise as excitation signal in a reverberant room.

ARCHISONIC_® Colours

Quiet Neutrals

12mm & 24 mm

These shades work in harmony with natural textural materials and soften industrial environments. From light to dark and cool to warm, these are the foundations of any scheme where longevity and a mood of calm is desired.



Warm Naturals

12mm & 24 mm

Combinations of lighter toned neutrals and pinks have a gently soothing and restorative effect while the more saturated hues make perfect environments for relaxation.




ARCHISONIC_® Colours

Living Greens

12mm & 24 mm


From the cool greens of forests to the yellowed aspect of young wheat, we see Living Greens breathing life into indoor spaces, and an essential palette for the future. Use in tonal layers brings the depth and diversity of green, while a single note can provide an amplifying backdrop to a biophilic space.

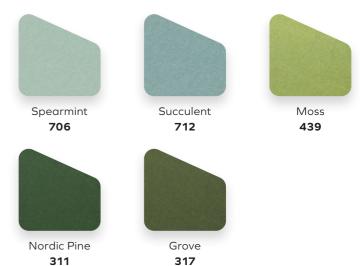

Elemental Blues

12mm & 24 mm

These blues work perfectly both as familiar single hues and in effortless tonal layers to create an immersive environment for focus or restoration.

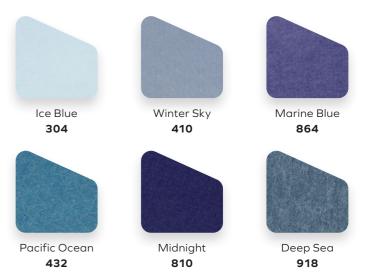




ARCHISONIC_® Colours

Soothing Pastels

12mm & 24 mm

With tonal duos of pink and blue and green, this perfectly balanced group is designed for peaceful plays on light and shade and playful contrast. While the lightest tones have a dreamlike quality, their deeper counterparts add a subtle grounding.

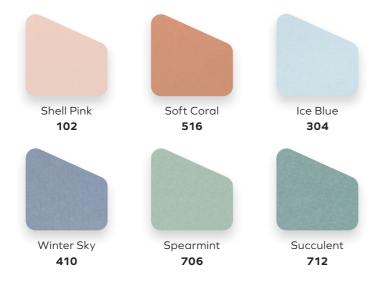

ARCHISONIC_® Colours

Energetic Brights

12mm & 24 mm

There are no rules here with endless possibilities for clashing contrasts or surprising highlights. For a sophisticated use of energetic colour, take a single hue and colour match contrasting textiles and solid surfaces.



Elegant Darks

12mm & 24 mm

While colour can create a mood, it is the depth or lightness of a hue that truly defines the emotion.
While each hue has the strength to stand alone, beautiful effects can be achieved with harmonized pairs.



Primary Play

12mm & 24 mm

The primary story happens when all three main colours are used together, with varied proportions creating differing moods. As with the Energetic Brights palette, combine with coordinating-coloured textiles and solid surfaces.







ARCHISONIC® Material

Composition

100% PET (60% certified post-consumer content)

Material Reutilisation

24mm 12mm

88 PET bottles/m² 53 PET bottles/m²

Density

24mm 12mm

 $4000 \, g/m^2 \, (+/-10\%)$ $2400 \, g/m^2 \, (+/-10\%)$

Dimensions Raw Panels

24mm 12mm

1800 x 2400 x 24mm 1200 x 2800 x 12mm 70" x 94" x 0.94" (+/-7%) 47" x 110" x 0.47" (+/-7%)

Fire Test

B-s1, d0 Class ADIN EN 13501-1 ASTM E84

VOC Emission

A+ Pass

28 Days French Regulation 14 Days CDPH/EHLB



Care Instructions

PET fibres do not provide a breeding ground for bacteria and other germs. The dyed-through fibres do not bleach out even when using aggressive cleaning agents and disinfectants. Alcohols, aldehydes or active chlorine can be used for cleaning.

For daily cleaning we recommend alcohol solution (75%), e.g. Pantasept. In case of contamination by dust or fluff, use feather duster or a regular vacuum cleaner. For heavy dirt, treat the material with hydrogen peroxide.





HWe Make An Impact