

PBA ANTI-MICROBIAL COATING

A M C

THE SURFACE FINISHING FOR HEALTH PROTECTION



PBA ANTI-MICROBIAL COATING

A M C

PRODUCTS IN ALUMINUM AND STAINLESS STEEL HAVE NATURAL ANTIBACTERIAL PROPERTIES AND A GOOD HANDLE ON CLEANLINESS. PBA ANTI-MICROBIAL COATING (AMC) IS AN INNOVATIVE FINISHING HIGHLY RECOMMENDED FOR ALL SITUATIONS WHERE HYGIENE IS EXTREMELY IMPORTANT NOT ONLY FOR THE DESTINATION. BUT ALSO FOR THE HIGH ATTENDANCE AS HOSPITALS AND GENERALLY PUBLIC SPACES.













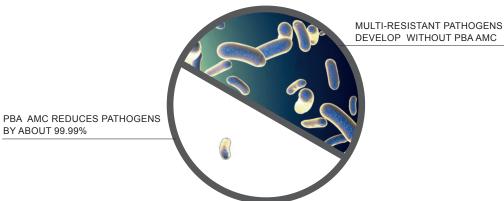

TRIED AND TESTED EFFICACY

REDUCES MULTI-RESISTANT PATHOGENS BY 99.99%. (EFFECT OF ANTI-BACTERIAL ACTIVITY ON STAINLESS STEEL AND ALUMINUM SURFACES).

>99.987 >99.987

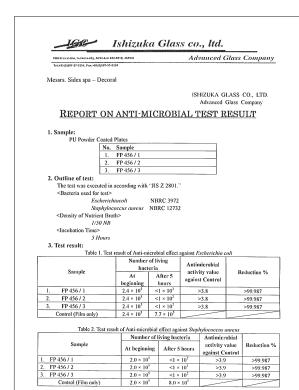

1880 Kawai-cho, Iwakura-city, Air	hi-han 482-9510, JAPAN	ATEST COME	Advanced Glass Company				
Tel:+81(0)597-37-3251; Pax:+81(0					rancea	Chuss	Company
Messrs. Sides spa – [Decoral srl.						
				151	HZUK A	GI ASS	CO., LTD.
							Company
REPORT	ON ANTI	MIC	ROB	AL I	EST	RESU	JLT
1. Sample:							
Powder Coate	ed Plates						
	No. Sample						
	1. DS413 (B						
	2. FP479 / 3						
	 DS733 (Same of the second of th						
. Outline of test:	4. FP479 / 1	(ronpu	(0)				
The test was execu	ted in according v	ith "JI:	S Z 2801				
<bacteria for<="" td="" used=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td></bacteria>							
n							
Esc	herichiacoli	NE	3RC 3972				
Staj	herichiacoli ohylococcus aurei						
Stap <heat treatment=""></heat>	ohylococcus aurei	s NB	RC 12732	2			
Stap <heat treatment=""> Heat</heat>		s NB	RC 12732	2	antimicro	bial testi	ng
Stap <heat treatment=""> Heat 3. Test result:</heat>	ohylococcus aurei nt Treatment at 10	s NB	RC 12732	prior to			_
Stap <heat treatment=""> Heat Test result:</heat>	ohylococcus aurei at Treatment at 10 t of Anti-microbial	s NB	RC 12732 13 days in gainst Esc	prior to			_
Stay <heat treatment=""> Heat Test result: Table 1. Test resul</heat>	ohylococcus aurei at Treatment at 10 t of Anti-microbial Num	s NB OC for effect a	RC 12732 13 days in gainst Esc.	prior to	coli witho	ut heat tro	atment
Stap <heat treatment=""> Heat Test result:</heat>	ohylococcus aurei at Treatment at 10 t of Anti-microbial Num	S NB OC for effect a per of I	RC 12732 13 days in gainst Esc.	prior to herichia Antim activit	<i>coli</i> witho	ut heat tro	_
Stap <heat treatment=""> Heat Test result: Table 1. Test resul Sample</heat>	ohylococcus aurei at Treatment at 10 t of Anti-microbial Num l At beginnin	S NB OC for effect a per of I	IRC 12732 13 days in gainst Esc. iving Mater 24 hours	prior to herichia Antim activit again	coli witho icrobial ty value st each ank	ut heat tro	atment
Stay <heat treatment=""> Hece b. Test result: Table 1. Test resul Sample DS413 (Blank)</heat>	ohylococcus aurei at Treatment at 10 t of Anti-microbial Num l At beginnin 9.6 × 10	9C for effect a per of I acteria	ISRC 12732 13 days in gainst Esc. iving After 24 hours .2 × 10 ⁷	prior to herichia Antim activit again Bl	coli witho icrobial ty value st each ank	ut heat tro	duction %
Stay <heat treatment=""> Hec 3. Test result: Table 1. Test resul Sample DS413 (Blank) FP479 / 3 (Ionpu</heat>	t of Anti-microbial Num I At beginnin 9,6 × 10 re) 9,6 × 10	oC for effect a per of 1 acteria g	IRC 12732 13 days in gainst Esc. iving After 24 hours 1.2 × 10 ⁷ <1 × 10 ²	prior to herichia Antim activit again Bl	coli witho icrobial ty value st each ank	ut heat tro	eatment % >99.999
Stay <heat treatment=""> Hec 3. Test result: Table 1. Test resul Sample . DS413 (Blank) . FP479 / 3 (Ionpu . DS733 (Sample</heat>	nt/lococcus auren at Treatment at 10 t of Anti-microbial	S NB OC for effect a per of I acteria g 1 2 1 4 4	13 days in against Escriving harmonic serving harmonic serving harmonic serving harmonic serving harmonic serving serv	prior to herichia Antim activit again Bl	coli witho icrobial ty value st each ank	ut heat tro	eatment %
Stay <heat treatment=""> Heat 3. Test result: Table 1. Test resul Sample . DS413 (Blank) . FP479 / 3 (Ionpu . FP479 / 1 (Ionpu . FP479 / 1 (Ionpu . FP479 / 1 (Ionpu</heat>	t of Anti-microbial Num	S NB OC for effect a per of I sacteria g	RC 12732 13 days in gainst Esc. iving After 24 hours .2 × 10 ⁷ .1 × 10 ² .8 × 10 ⁷ .1 × 10 ²	prior to herichia Antim activit again Bl	coli witho icrobial ty value st each ank	ut heat tro	eatment % >99.999
Stay <heat treatment=""> Hec 3. Test result: Table 1. Test resul Sample . DS413 (Blank) . FP479 / 3 (Ionpu . DS733 (Sample</heat>	nt/lococcus auren at Treatment at 10 t of Anti-microbial	S NB OC for effect a per of I sacteria g	13 days in against Escriving harmonic serving harmonic serving harmonic serving harmonic serving harmonic serving serv	prior to herichia Antim activit again Bl	coli witho icrobial ty value st each ank	ut heat tro	eatment %
Say <heat treatment=""> Hec 3. Test result: Table 1. Test resul Sample DS413 (Blank) . DS413 (Glank) . DS733 (Sample . PF479 / 1 (Jopu Control (Film only)</heat>	tof Anti-microbial Num 1	S NB OC for effect a per of I acteria 4 2 4 1 4 1 4 2	RC 12732 13 days in against Esc. iving hours 12 × 10 ⁷ 11 × 10 ² 1.7 × 10 ⁷	herichia Antim activit again Bl	coli witho icrobial ty value st each ank 5.3	Re	**************************************
Stay <heat treatment=""> Heat 3. Test result: Table 1. Test resul Sample DS413 (Blank) FP479 / 3 (Ionpu DS733 (Sample FP479 / 1 (Ionpu FP479 / 1 (Ionpu</heat>	ohylococcus aurer at Treatment at 10 t of Anti-microbial At t beginnin 9.6 × 10 10 9.6 × 10 10 9.6 × 10 10 9.6 × 10 10 9.6 × 10 10 10 10 10 10 10 10 10 10 10 10 10 1	S NB OC for effect a per of I sacteria y g 1 2 1 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	RC 12732 13 days in against Esc. iving hours 12 × 10 ⁷ 11 × 10 ² 1.7 × 10 ⁷	Antim activit again Bl	coli witho icrobial ty value st each ank 5.3	Re	**************************************
Stay - Heat Treatment's - Heat Treatment's - Heat Treatment's - Table 1. Test result - Sample - DS413 (Blank) - DS413 (Blank) - FP479 / 3 (tonpul) - FP479 / 1 (lonpul) - Control (Film only) - Table 2. Test result of	ohylococcus aurer at Treatment at 10 t of Anti-microbial At t beginnin 9.6 × 10 10 9.6 × 10 10 9.6 × 10 10 9.6 × 10 10 9.6 × 10 10 10 10 10 10 10 10 10 10 10 10 10 1	S NB OC for effect a per of I sacteria y g 1 2 1 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	RC 12732 13 days in gainst Esc. iving After 24 hours .2 × 10 ⁷ $< 1 × 10^2$.8 × 10 ⁷ $< 1 × 10^2$.nst Staphy.	Antim activit again Bl	coli witho icrobial ty value st each ank 5.3 aureus wi	Re	duction %
Say Sheat Treatments Hecc 3. Test result: Table 1. Test resul Sample DS413 (Blank) DS413 (Blank) DS733 (Sample FP479 / 1 (Ioppu Control (Film only)	ohylococcus aurer at Treatment at 10 t of Anti-microbial At t beginnin 9.6 × 10 10 9.6 × 10 10 9.6 × 10 10 9.6 × 10 10 9.6 × 10 10 10 10 10 10 10 10 10 10 10 10 10 1	s NB OC for effect as over of 1 acteria / g i 2 i 2 i 2 i 2 i 2 cect again	RC 12732 13 days in gainst Esc. iving After 24 hours .2 × 10 ⁷ $< 1 × 10^2$.8 × 10 ⁷ $< 1 × 10^2$.nst Staphy.	prior to herichia Antim activii again Bl > lococcus teria	coli witho icrobial ty value st each ank 5.3 5.3 Antimi activity agains	thout hea	**************************************
Say Heat Treatment's Hec Test result: Table 1. Test resul Sample DS413 (Blank) FP479 / 3 (Ionpu DS733 (Sample FP479 / 1 (Ionpu Control (Film only) Table 2. Test result of	Num	s NB OC for effect a acteris y y 4 1 2 4 4 4 1 4 4 4 4 1 4 4 4 2 2 2 2 2	13 days in against Esciving 14 hours 12 × 10 ⁷ < 1 × 10 ²	herichia Antim activit again Bi > lococcus teria	coli witho icrobial ty value st each ank 5.3 2.3 aureus wi activity agains Bla	thout hea crobial y value t each	duction %
Step - Heat Treatment> Heat Treatment> Heat Table 1. Test result: Table 1. Test result Sample DS413 (Blank) FP479 / 3 (Ionpul DS733 (Sample FP479 / 1 (Ionpul Control (Film only) Table 2. Test result of Sample DS413 (Blank)	Anti-microbial Anti-microbial	s NB OC for effect a acteris y y 4 1 4 4 1 4 4 4 1 4 4 4 1 4 4 4 1 1 4 4 1	RC 12732 13 days in	prior to herichia Antim activit again Bl >	coli witho icrobial y value st each ank 5.3 aureus wi Antimi activity agains Bla	thout hea	duction % >99.999 t treatment Reduction %
Say - See See See See See See See See See Se		s NB OC for effect a beer of I la acteria g 1	RC 12732	prior to herichia Antim activit again Bl > lococcus teria 4 hours 106 102	coli witho icrobial ty value st each ank 5.3 Antimi activit; agains Bla	thout hea crobial y value t each	duction %
Seg	Anti-microbial Anti-microbial	s NB OC for effect a series of 1 g 4 2 g 4 4 1 4 4 2 cect again	RC 12732 13 days in	prior to herichia Antima etiviria againi againi againi ativiti ativiti againi ativiti at	coli witho icrobial y value st each ank 5.3 aureus wi Antimi activity agains Bla	thout hea crobial y value t each ink	duction % >99.999 t treatment Reduction %



PBA ANTI-MICROBIAL COATING



THE **PBA ANTI-MICROBIAL COATING (AMC)** SURFACE FINISHING CONTAINS SPECIAL ADDITIVES THAT MAKE THE SURFACE PROTECTED FROM BACTERIA AND MICROORGANISMS. THE TESTS SHOW THAT ON UNTREATED SURFACES THE MICROBES AND BACTERIA CAN EASILY PROLIFERATE WHILE ON THE TREATED SURFACES THE BACTERIAL PROLIFERATION IS PRACTICALLY ZEROED.

PRODUCTS WITH PBA ANTI-MICROBIAL COATING (AMC) HAVE BEEN TESTED BY AN INDEPENDENT LABORATORY IN JAPAN, WHICH HAS CERTIFIED THE EFFECTIVENESS ANTIBACTERIAL AGAINST THE TWO MAIN TYPES OF BACTERIA (ESCHERICHIA COLI AND STAPHYLOCOCCUS AUREUS).

WHERE TO USE

WE RECOMMEND PBA ANTI-MICROBIAL COATING (AMC) FOR ALL THE AREAS HYGIENE-SENSITIVE AS HOSPITALS AND RETIREMENT HOME AND GENERALLY FOR PUBLIC BUILDINGS AND HOTELS.

CARE AND MAINTENANCE

PBA ANTI-MICROBIAL COATING (AMC) NEEDS THE SAME CARE OF STANDARD POWDER-COATED SURFACES. SEE PBA CATALOGUE TECHNICAL SECTION FOR MORE INFORMATION.

STAINLESS STEEL AND ALUMINUM

ALL PBA PRODUCTS IN STAINLESS STEEL AND ALUMINUM CAN BE TREATED WITH PBA ANTI-MICROBIAL COATING (AMC).

DURABILITY

PRODUCTS WITH PBA ANTI-MICROBIAL COATING (AMC) WERE SUBJECTED TO ACCELERATED AGING TESTS FOR THE SIMULATION OF AN EXPOSURE PERIOD OF TEN YEARS: THE ANTIBACTERIAL CAPACITY AT THE END OF THE TEST IS UNCHANGED, AT 100% OF ITS EFFICIENCY.

LABELING

PBA ANTI-MICROBIAL COATING (AMC) IS COLOURLESS, HENCE INVISIBLE: THE PRODUCTS HAVE A AMC LABEL ON THE BACK TO KEEP SEPARATED FROM UN-FINISHED PRODUCTS.



PROGRAMMA 400-HR STAINLESS STEEL HANDRAIL



DESIGN. FOR ALL





PROGRAMMA 400-SS STAINLESS STEEL SUPPORTS AND BATHROOM ACCESSORIES

PBA ANTI-MICROBIAL COATING (AMC) + DESIGN FOR ALL

DESIGN FOR ALL SERIES 400-SS AND 400-ALU ARE IN STAINLESS STEEL AND IN ALUMINUM. BOTH SERIES HAVE AN ERGONOMIC AND CLEAN DESIGN, SUITABLE FOR HEALTHCARE FACILITIES, PRIVATE RESIDENCES, PUBLIC PLACES, OFFICES, RESTAURANTS AND HOTELS.

PBA ANTI-MICROBIAL COATING (AMC) IS THE PERFECT FINISHING FOR DESIGN FOR ALL 400-SS AND 400-ALU PRODUCTS TO TOTALLY SATISFY THE HYGIENIC REQUIREMENTS OF SENSITIVE AREAS.

THE PBA ANTI-MICROBIAL COATING (AMC) TRANSPARENT FINISHING CAN BE APPLIED TO STAINLESS STEEL PRODUCTS PROGRAMMA 400-SS (SATIN AND POLISHED) AND ALUMINUM PRODUCTS PROGRAMMA 400-ALU (ANODIZED ALUMINUM - AMC ONLY FOR ANODIZED ALUMINUM COMPONENTS).

WE RECOMMEND TO USE THIS FINISHING FOR GRAB BAR AND FOR ALL THE ACCESSORIES AND PRODUCTS FREQUENTLY TOUCHED.



ARCHITECTURAL HARDWARE.





PROGRAMMA 2000 STAINLESS STEEL HANDLES AND DOOR ACCESSORIES

PBA ANTI-MICROBIAL COATING (AMC) + ARCHITECTURAL HARDWARE

HOW MANY TIMES A DAY HANDRAILS, HANDLES AND LEVERS ARE TOUCHED BY DIFFERENT HANDS EVERYWHERE AND SPECIFICALLY IN PUBLIC SPACES, OFFICES AND HOSPITAL?

STAINLESS STEEL AND ALUMINUM PRODUCTS HAVE LITERALLY A GOOD HANDLE ON CLEANLINESS, BUT THE PBA ANTI-MICROBIAL COATING (AMC) IS THE BEST SOLUTION TO REDUCE THE POTENTIAL RISK OF PATHOGEN TRANSMISSION. WE RECOMMEND THIS FINISHING FOR ALL PRODUCTS LOCATED IN HIGH ATTENDANCE AREAS AND IN HEALTHCARE BUILDING.

PBA IS WORLDWIDE KNOWS AS THE BRAND OF 316L STAINLESS STEEL AND THE BEST ALUMINUM ALLOY. ALL THE ARCHITECTURAL HARDWARE SERIES ARE AVAILABLE WITH PBA ANTI-MICROBIAL COATING (AMC).

PBA ANTI-MICROBIAL COATING (AMC) IS AVAILABLE FOR ALL STAINLESS STEEL AND ALUMINUM ARCHITECTURAL HARDWARE PRODUCTS: HANDRAIL, HANDLES, PULL HANDLES, LOCKING AND NON LOCKING LADDER PULLS, LOCKSET FOR FRAMELESS GLASS DOOR, SIGNAGE AND DOOR ACCESSORIES.

THE PBA ANTI-MICROBIAL COATING (AMC) FOR PBA HARDWARE IS AVAILABLE IN TRANSPARENT FINISHING AND IN BLACK RAL 9005 FINISHING.

VISIT OUR WEBSITE WWW.PBA.IT FOR MORE INFORMATION ON ARCHITECTURAL HARDWARE PRODUCTS.

pba S.p.A. Via Enrico Fermi, 1 I-36056 Tezze sul Brenta (Vicenza) Italia Tel. +39 0424 5451 Fax +39 0424 545222 info@pba.it www.pba.it

pba Deutschland GmbH Zum Schürmannsgraben 24 D-47441 Moers Deutschland Tel. +49 2841 99890 0 Fax +49 2841 99890 20 info@de.pba.it www.pba.it

pba USA, Inc. 68 34th Street Suite C405 Unit 20 Industry City Brooklyn NYC NY 11232 United States Tel. +1 212 255 4605 Fax +1 646 558 0335 office@pba-usa.us