

KINGS CROSS

Wallcovering



KINGS CROSS 24MM

Wallcovering

KINGS CROSS is an acoustic wall solution with classic universal pattern that works with almost everywhere. It creates an endless interconnected and overlapping lines that give a space depth and movement.

ARTICLE NUMBER


732.24.12.000.00

DIMENSIONS

Length:	1800mm	70.86"
Width:	2400 mm	94.48"
Thickness:	24mm	0.94"

CONNECTION


KINGS CROSS is mounted on the wall with a biodegradable double-contact glue.

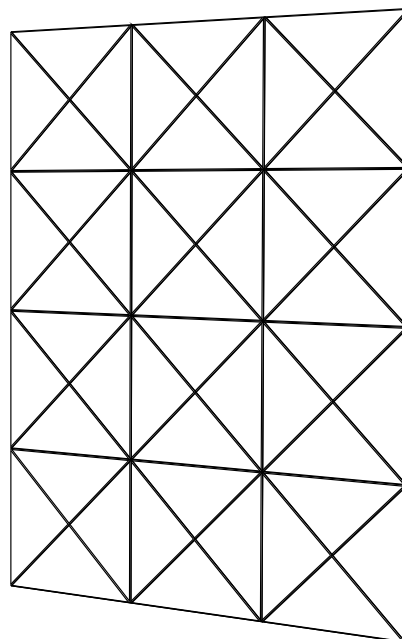

SIDE



FRONT

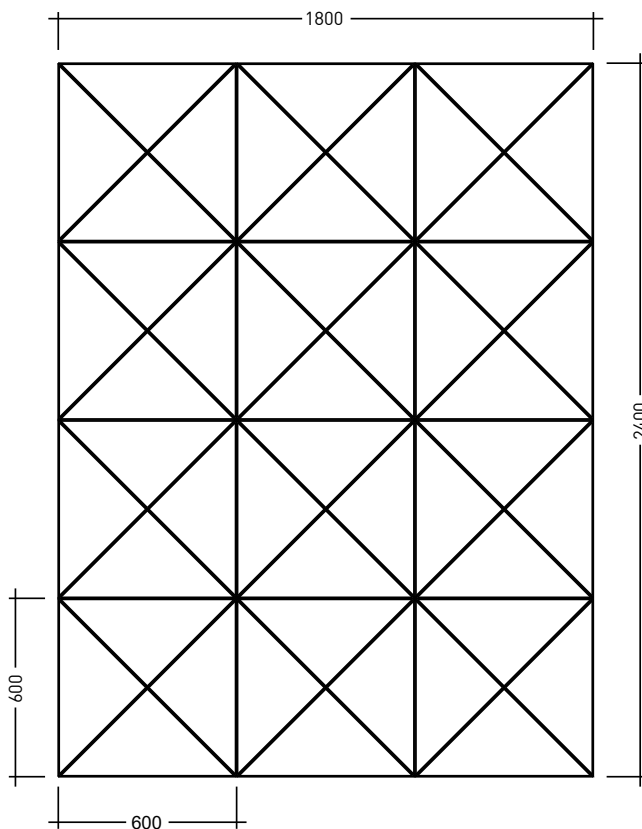

KINGS CROSS 12MM

Wallcovering

KINGS CROSS is an acoustic wall solution with classic universal pattern that works with almost everywhere. It creates an endless interconnected and overlapping lines that give a space depth and movement.

ARTICLE NUMBER


732.12.12.000.00

DIMENSIONS

Length:	1200mm	47.24"
Width:	2800 mm	110.23"
Thickness:	12 mm	0.47"

CONNECTION


KINGS CROSS is mounted on the wall with a biodegradable double-contact glue.

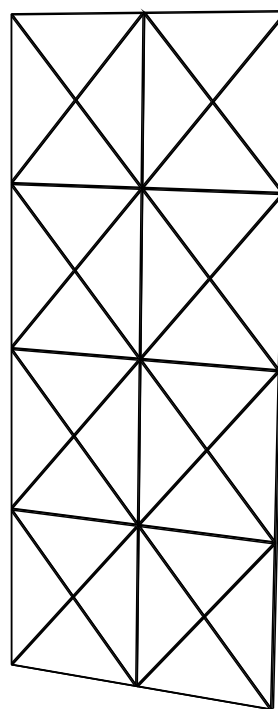

SIDE



FRONT

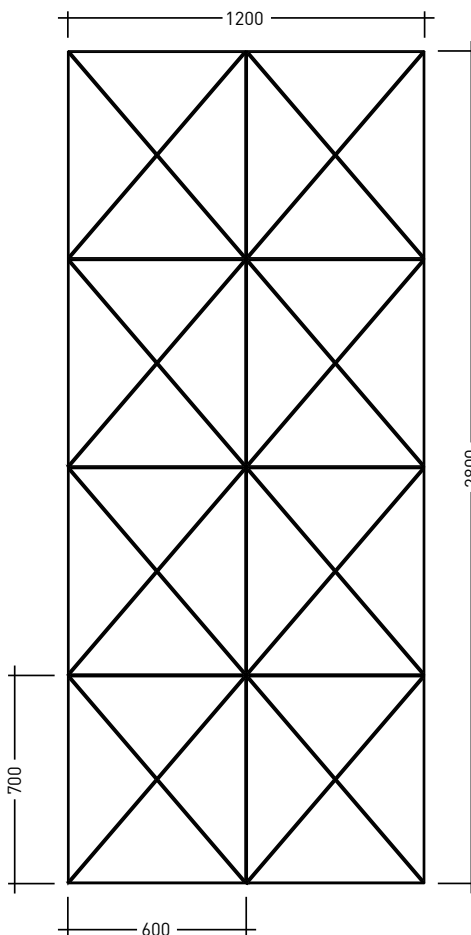

TECHNICAL DATA SHEET

ARCHISONIC®

Colour Families


ARCHISONIC® is a high-performance sustainable acoustic absorber made from upcycled plastic bottles which is Cradle to Cradle certified and LEED accredited.

ARCHISONIC® is manufactured at the highest quality standards, yet slight color and surface deviations caused by the high degree of recycled fiber are an inevitable part of the product characteristics and do not claim warranty services.

Material varies in colour when shown in monitor or in print. Please request a material sample to verify colours.

QUIET NEUTRALS

24 mm

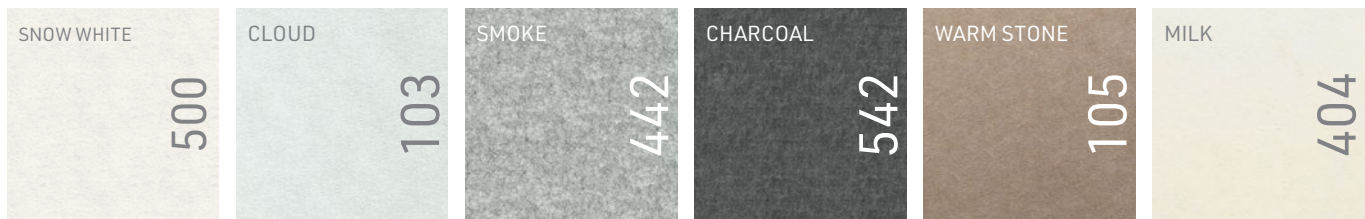


WARM NEUTRALS

24 mm



LIVING GREENS

24 mm

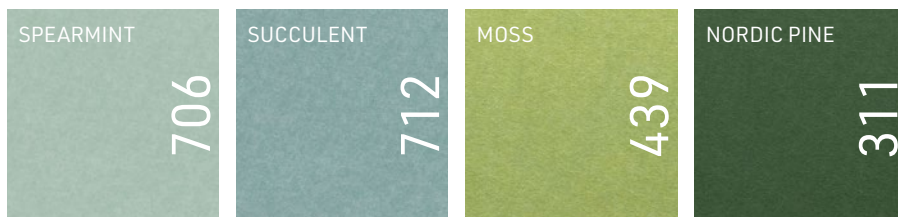

ELEMENTAL BLUES

24 mm



SOOTHING PASTELS

24 mm




ELEGANT DARKS

24 mm



ENERGETIC BRIGHTS

24 mm

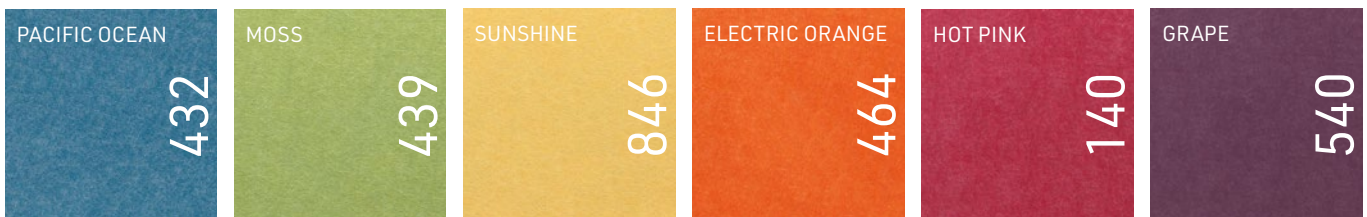

PRIMARY PLAY

24 mm



DIMENSIONS

ARCHISONIC® 24 mm 1800 x 2400 x 24 mm (70" x 94" x 0.94")
ARCHISONIC® 12 mm 1200 x 2800 x 12 mm (47" x 10" x 0.47")

COMPOSITION

100% PET (min. 60% post-consumer)

FIRE TEST

DIN EN 13501-1 B-s1, d0
ASTM E-84 Class A

VOC EMISSION

CDPH 01350 Pass
ISO 16000 (CDPH/EHLB/Standard Method V1.2.)
EN 16516

COLOUR FASTENESS

EN ISO 105-B02, A1 Grade 6

SOUND ABSORPTION

DIN ISO 11654

24 mm aw 0.55 (no airgap)
aw 0.65 (50 mm / 2" air gap)
aw 0.90 (100 mm / 4" air gap)
aw 0.95 (200 mm / 8" air gap)
aw 0.95 (300 mm / 11" air gap).

12 mm aw 0.30 (no air gap)

MATERIAL REUTILISATION

ARCHISONIC® 24 mm 88 plastic bottles/m²
ARCHISONIC® 12 mm 53 plastic bottles/m²

ENVIRONMENTAL

Cradle to Cradle Certified™
Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit (Low-emitting products)

SUPPORTED BY

Climate KIC

