

IMPACT ACOUSTIC®



HABITAT
MATTER

habitatmatter.com
spec@habitatmatter.com

ARCHISONIC®

Felt

812.10.24.000.00
812.10.12.000.00

TECHNICAL DATA SHEET

ARCHISONIC®

Colours

Quiet Neutrals

12mm & 24 mm

These shades work in harmony with natural textural materials and soften industrial environments. From light to dark and cool to warm, these are the foundations of any scheme where longevity and a mood of calm is desired.



Warm Naturals

12mm & 24 mm

Combinations of lighter toned neutrals and pinks have a gently soothing and restorative effect while the more saturated hues make perfect environments for relaxation.



ARCHISONIC®

Colours

Living Greens

12mm & 24 mm


From the cool greens of forests to the yellowed aspect of young wheat, we see Living Greens breathing life into indoor spaces, and an essential palette for the future. Use in tonal layers brings the depth and diversity of green, while a single note can provide an amplifying backdrop to a biophilic space.



Elemental Blues

12mm & 24 mm

These blues work perfectly both as familiar single hues and in effortless tonal layers to create an immersive environment for focus or restoration.

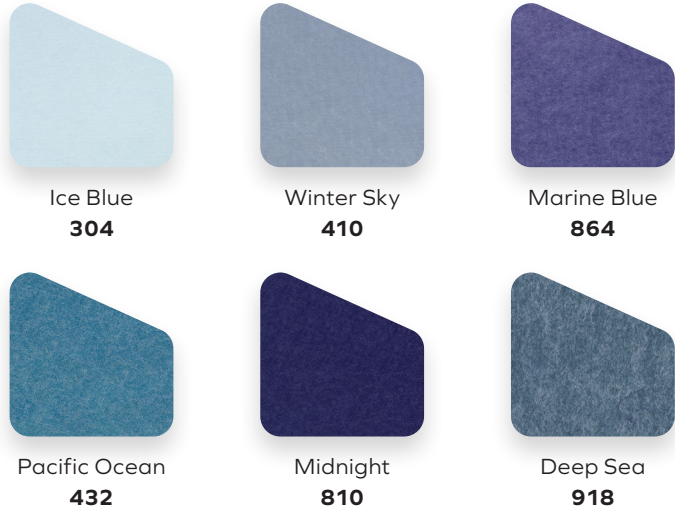

ARCHISONIC®

Colours

Soothing Pastels

12mm & 24 mm

With tonal duos of pink and blue and green, this perfectly balanced group is designed for peaceful plays on light and shade and playful contrast. While the lightest tones have a dreamlike quality, their deeper counterparts add a subtle grounding.



Shell Pink
102



Soft Coral
516



Ice Blue
304



Winter Sky
410



Spearment
706



Succulent
712

Elegant Darks

12mm & 24 mm

While colour can create a mood, it is the depth or lightness of a hue that truly defines the emotion. While each hue has the strength to stand alone, beautiful effects can be achieved with harmonized pairs.



Garnet
724



Marine Blue
864



Midnight
810



Nordic Pine
311



Raven
550

ARCHISONIC®

Colours

Energetic Brights

12mm & 24 mm

There are no rules here with endless possibilities for clashing contrasts or surprising highlights. For a sophisticated use of energetic colour, take a single hue and colour match contrasting textiles and solid surfaces.



Pacific Ocean
432



Moss
439



Sunshine
846



Electric Orange
464



Hot Pink
140

Primary Play

12mm & 24 mm

The primary story happens when all three main colours are used together, with varied proportions creating differing moods. As with the Energetic Brights palette, combine with coordinating-coloured textiles and solid surfaces.



Snow White
500



Charcoal
542



Sunshine
846



Poster Red
662



Marine Blue
864

ARCHISONIC®

Felt

Composition

100% PET (60% certified post-consumer content)

Material Reutilisation

24mm	12mm
88 PET bottles/m ²	53 PET bottles/m ²

Density

24mm	12mm
4000 g/m ² (+/-10%)	2400 g/m ² (+/-10%)

Dimensions Raw Panels

24mm	12mm
1800 x 2400 x 24mm	1200 x 2800 x 12mm
70" x 94" x 0.94" (+/-7%)	47" x 110" x 0.47" (+/-7%)

Fire Test

B-s1, d0	Class A
DIN EN 13501-1	ASTM E84

VOC Emission


A+	Pass
28 Days French Regulation	14 Days CDPH/EHLB



Care Instructions

PET fibres do not provide a breeding ground for bacteria and other germs. The dyed-through fibres do not bleach out even when using aggressive cleaning agents and disinfectants. Alcohols, aldehydes or active chlorine can be used for cleaning.

For daily cleaning we recommend alcohol solution (75%), e.g. Pantasept. In case of contamination by dust or fluff, use feather duster or a regular vacuum cleaner. For heavy dirt, treat the material with hydrogen peroxide.

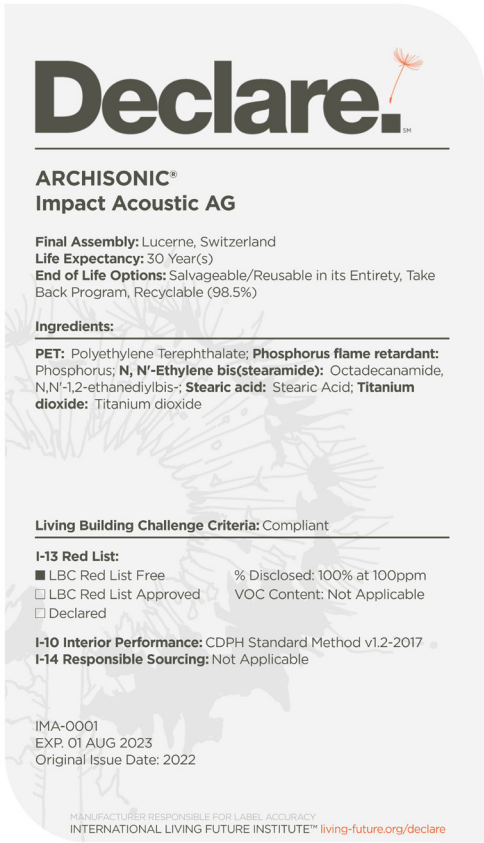

ARCHISONIC®

Felt

Matching NCS Colour Codes

Developed by Colour Hive

Quiet Neutrals	500	103	442	108	542	444	550	107	920
NCS Code	S 0300-N	S 1002-B	S 3005-R80B	S 5005-Y20R	S 7502-B	S 4500-N	S 8500-N	S 1505-Y30R	S 3010-Y30R
Warm Naturals	105	404	102	516	239	724	107	920	139
NCS Code	S 3010-Y50R	S 0502-Y	S 0510-R30B	S 2020-Y90R	S 4040-Y70R	S 5040-R10B	S 1505-Y30R	S 3010-Y30R	S 2050-Y20R
Living Greens	706	712	439	311	317				
NCS Code	S 1010-B90G	S 3020-B30G	S 2040-G40Y	S 5030-G10Y	S 7020-G30Y				
Elemental Blues	304	410	864	432	810	918			
NCS Code	S 0510-B	S 2020-R90B	S 4050-R70B	S 3040-B	S 7020-R70B	S 5020-R90B			
Soothing Pastels	102	516	304	410	706	712			
NCS Code	S 0510-R30B	S 2020-Y90R	S 0510-B	S 2020-R90B	S 1010-B90G	S 3020-B30G			
Elegant Darks	724	846	810	311	550				
NCS Code	S 5040-R10B	S 4050-R70B	S 7020-R70B	S 5030-G10Y	S 8500-N				
Energetic Brights	432	439	846	464	140	540			
NCS Code	S 3040-B	S 2040-G40Y	S 1040-Y10R	S 0580-Y70R	S 2060-R20B	S 5040-R40B			
Primary Play	500	542	846	662	864				
NCS Code	S 0300-N	S 7502-B	S 1040-Y10R	S 1080-R	S 4050-R70B				

These NCS codes are the closest visual match available and may not be exact to blended fibres.

Colour fastness

Class 6
ISO 105-B02:A1

Colour and surface deviation


ARCHISONIC® Felt is manufactured to the highest quality standards, but slight colour and surface variations caused by the high percentage of recycled fibers are an unavoidable part of the product characteristics and do not claim warranty. Please request a free sample box to verify the colours.

Acoustic Technical Specifications

Archisonic Felt 24mm

Frequency (Hz)	125	250	500	1000	2000	4000	αw	NRC	
Archisonic Felt 24mm		0.05	0.25	0.55	0.90	1.05	1.10	0.55	0.70
Archisonic Felt 24mm with 40mm insulation	0.45	0.70	0.90	0.95	0.95	0.95	0.80	0.90	
Archisonic Felt 24mm with 50mm insulation	0.55	0.80	0.90	0.95	0.95	0.95	0.85	0.90	
Archisonic Felt 24mm with 50mm air cavity	0.15	0.35	0.75	1.00	1.00	1.05	0.65	0.80	
Archisonic Felt 24mm with 100mm air cavity	0.20	0.65	0.90	1.00	0.95	1.05	0.90	0.90	
Archisonic Felt 24mm with 200mm air cavity	0.55	0.85	0.90	0.90	1.00	1.05	0.95	0.90	
Archisonic Felt 24mm with 300mm air cavity	0.70	0.85	0.85	0.95	1.00	1.05	0.95	0.90	

Sound Absorption Coefficient (αs) according to EN ISO 354
Universität Stuttgart – Institut für Akustik und Bauphysik IABP

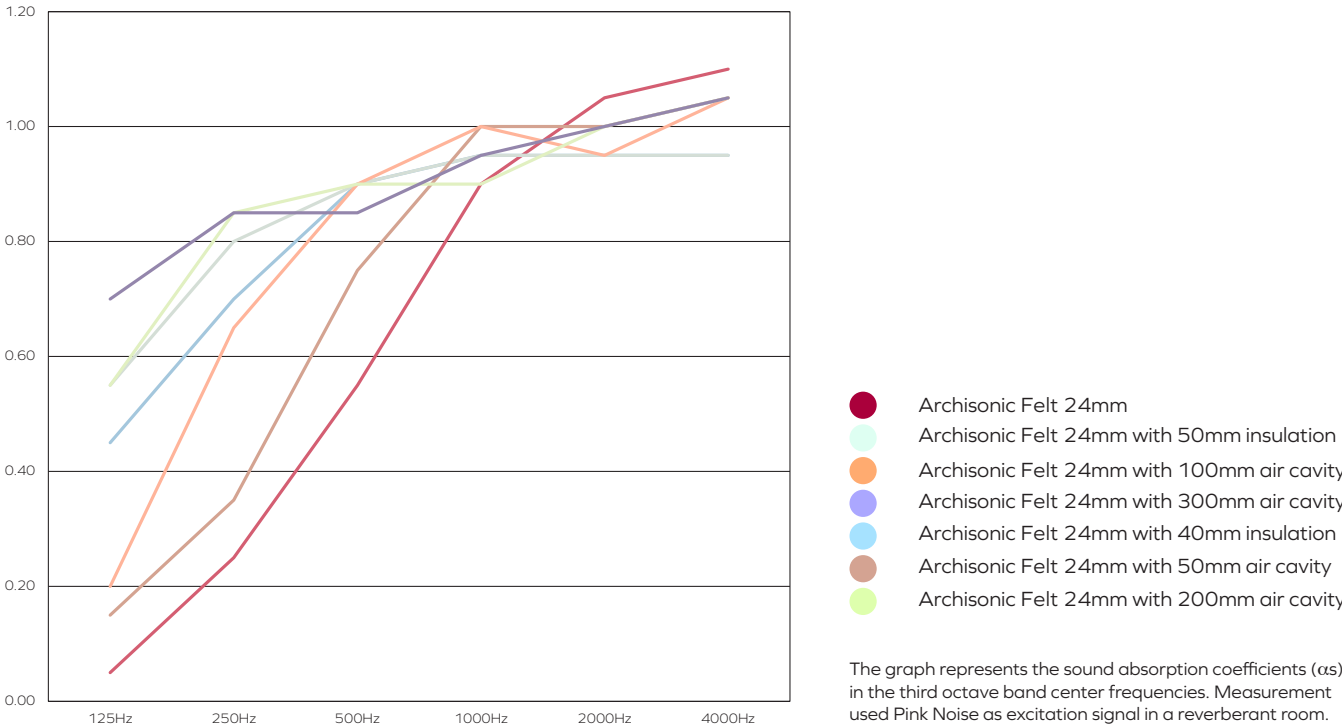


Acoustic Technical Specifications

Archisonic Felt 12mm

Frequency (Hz)	125	250	500	1000	2000	4000	αw	NRC	
Archisonic Felt 12mm	0.05	0.05	0.25	0.55	0.85	1.05	0.30	0.45	
Archisonic Felt 12mm with 40mm insulation	0.30	0.55	0.75	0.90	0.95	0.95	0.75	0.80	
Archisonic Felt 12mm with 50mm insulation	0.40	0.65	0.85	0.95	0.95	0.95	0.80	0.85	
Archisonic Felt 12mm with 50mm air cavity	0.05	0.15	0.40	0.70	0.80	0.75	0.50	0.50	

Sound Absorption Coefficient (αs) according to EN ISO 354
Universität Stuttgart – Institut für Akustik und Bauphysik IABP

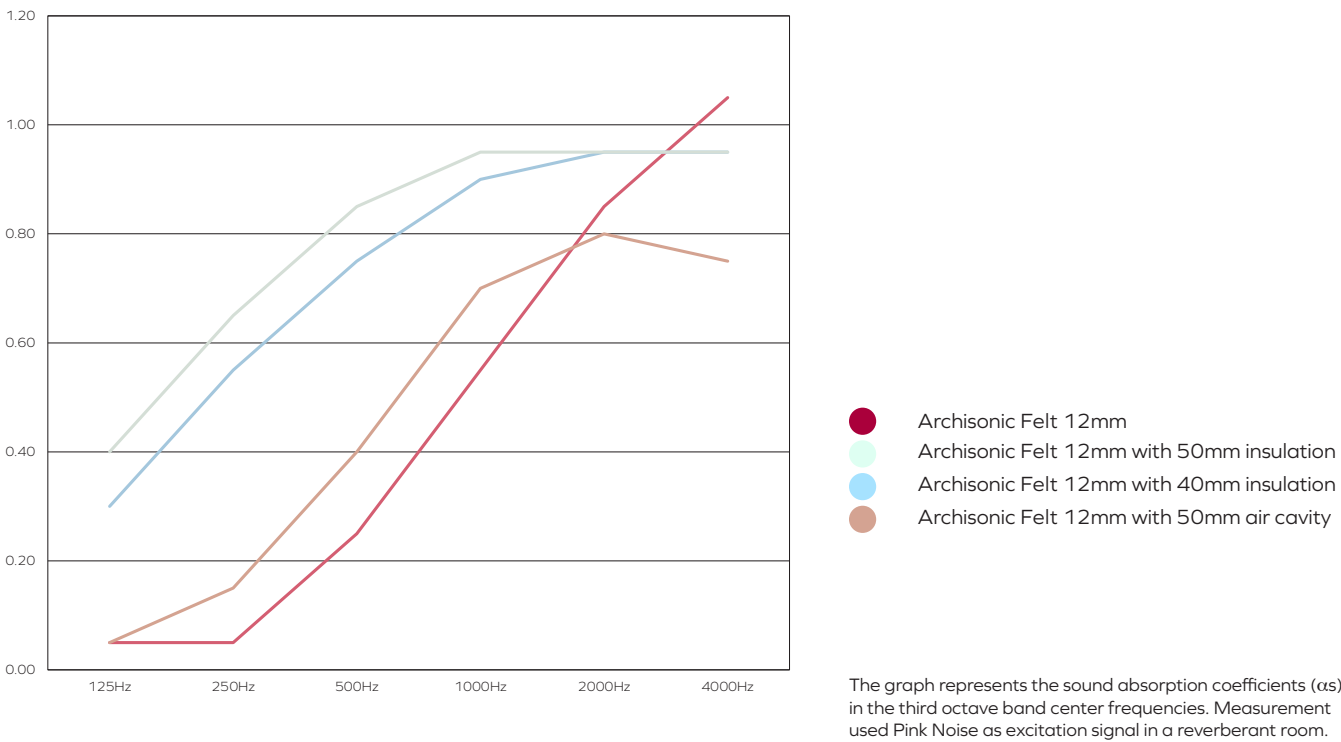

ARCHISONIC®

Felt



Light Reflection

Hochschule Luzern – Institut für Gebäudetechnik | Energie



Quiet Neutrals	500	103	442	108	542	444	550
Reflectance p	61.9%	51.4%	34.6%	22.5%	6%	7.9%	2.6%
Warm Naturals	105	404	102	516	239	724	
Reflectance p	27.5%	59.3%	55.2%	34.1%	10.3%	4.1%	
Living Greens	706	712	439	311	317		
Reflectance p	51.7%	27.7%	33.2%	10.3%	9.6%		
Elemental Blues	304	410	864	432	810		
Reflectance p	60%	32%	9.5%	15.2%	3.7%		
Soothing Pastels	102	516	304	410	706	712	
Reflectance p	55.2%	34.1%	60%	32%	51.7%	27.7%	
Elegant Darks	724	846	810	311	550		
Reflectance p	4.1%	9.7%	3.7%	10.3%	2.6%		
Energetic Brights	432	439	846	464	140	540	
Reflectance p	15.2%	33.2%	44.3%	26.8%	12.2%	5.5%	
Primary Play	500	542	846	662	864		
Reflectance p	61.9%	6%	44.3%	12.5%	9.5%		

Sustainability



Supported by





HABITAT
MATTER

habitatmatter.com
spec@habitatmatter.com

#We Make An Impact

connect@impactacoustic.com | www.impactacoustic.swiss