


IMPACT ACOUSTIC®

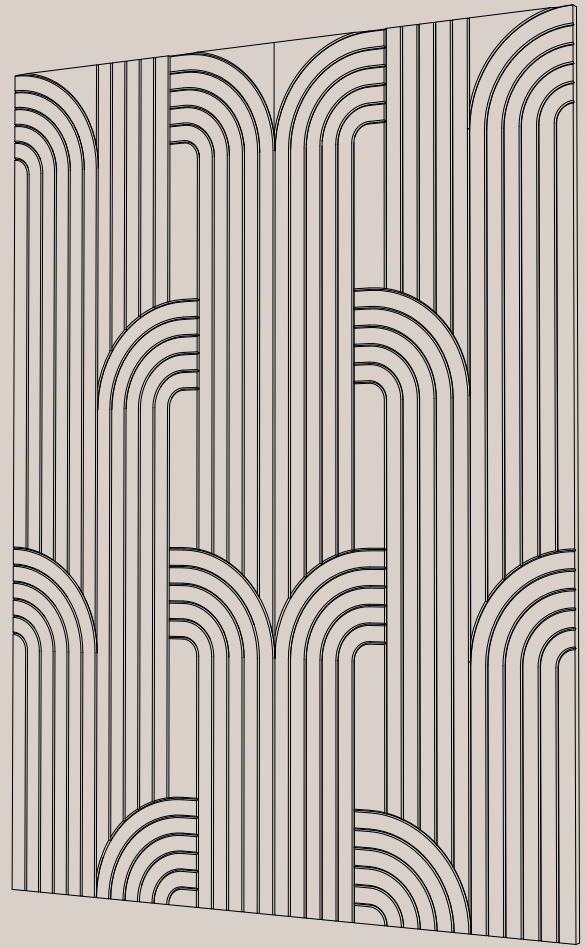

# Fon

## Wall Covering

732.24.25.000.00  
732.12.25.000.00

# Fon

## Wall Covering

### Article Number

732.24.25.000.00

### Dimensions



Length	1800mm	70.86"
Width	2400mm	94.48"
Thickness	24mm	0.94"

### Assembly

Fon is mounted with a biodegradable contact spray adhesive.


### Information

1 pc., incl. installation kit

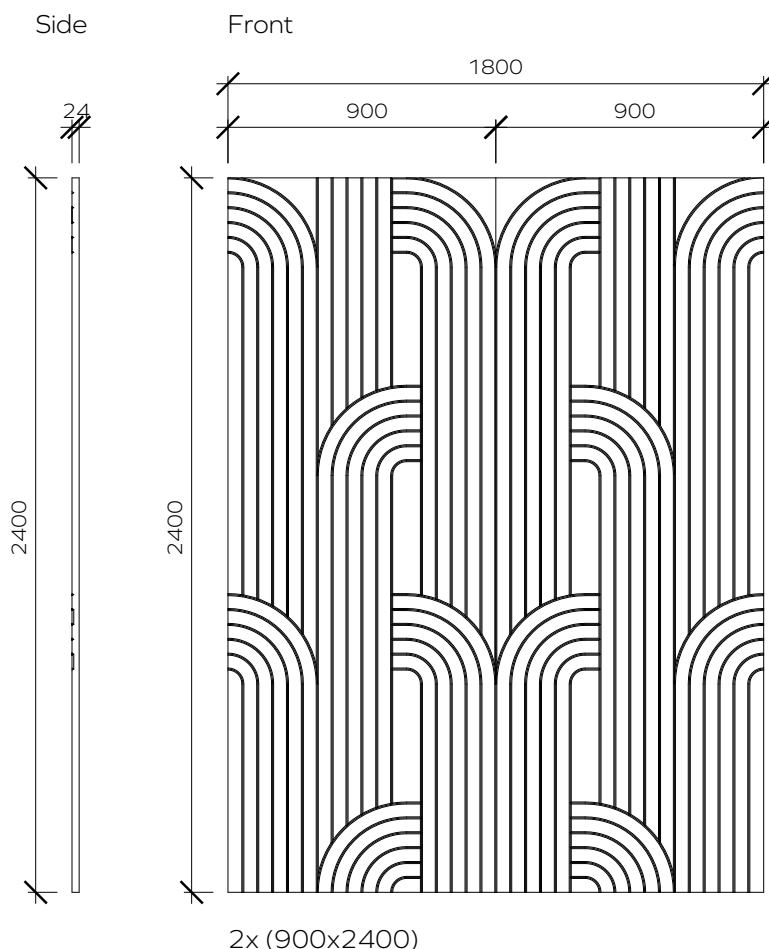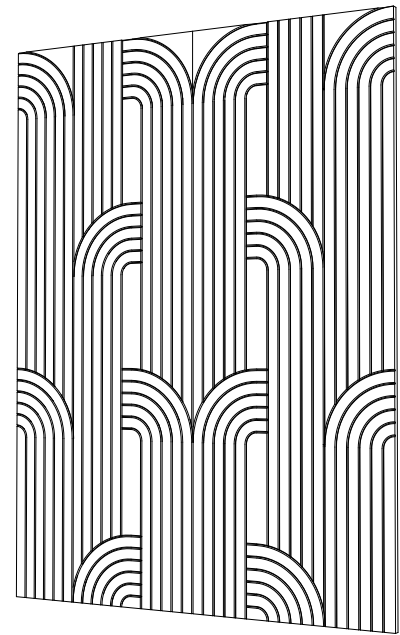

2x (900x2400)

### V-cut Detail

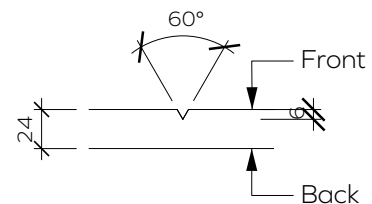

# Fon

## Wall Covering

### Article Number

732.12.25.000.00

### Dimensions




Length	1200mm	47.24"
Width	2800mm	110.23"
Thickness	12mm	0.47"

### Assembly

Fon is mounted with a biodegradable contact spray adhesive.

### Information

1 pc., incl. installation kit

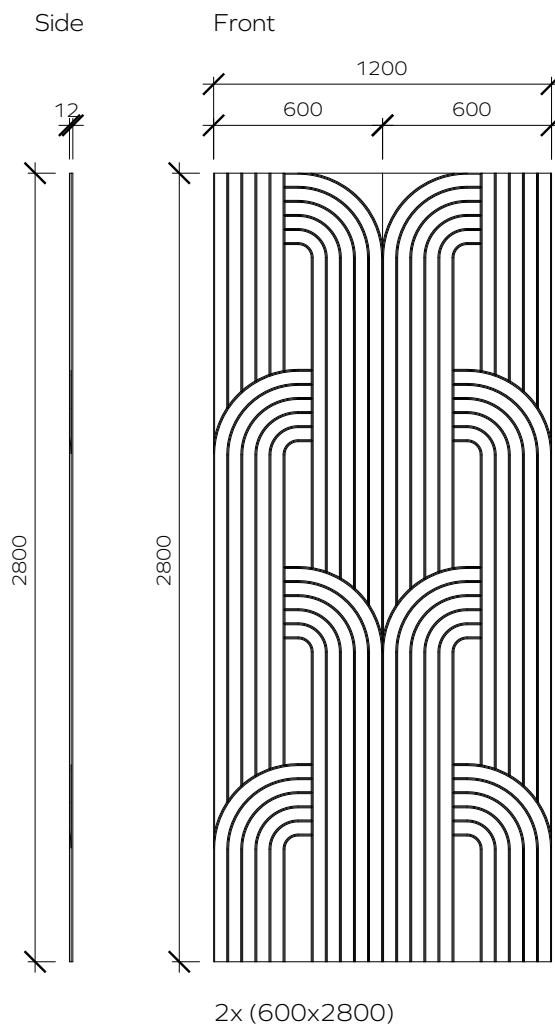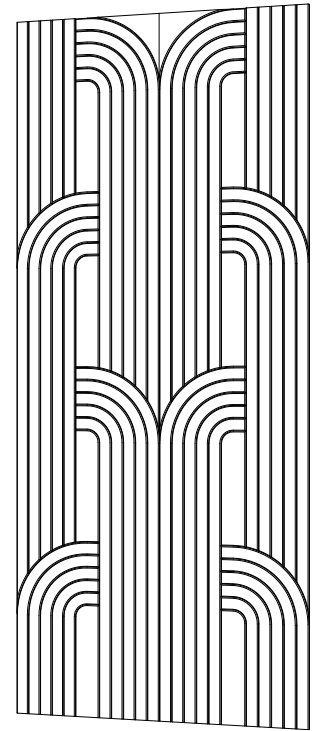


# Fon Wall Covering

## Acoustic Technical Specifications

### Fon Wall Covering 24mm

Frequency (Hz)	125	250	500	1000	2000	4000	aw	NRC
Archisonic 24mm	0.05	0.25	0.55	0.90	1.05	1.10	0.55	0.70
Archisonic 24mm with 40mm insulation	0.45	0.70	0.90	0.95	0.95	0.95	0.80	0.90
Archisonic 24mm with 50mm insulation	0.55	0.80	0.90	0.95	0.95	0.95	0.85	0.90
Archisonic 24mm with 50mm air cavity	0.15	0.35	0.75	1.00	1.00	1.05	0.65	0.80
Archisonic 24mm with 100mm air cavity	0.20	0.65	0.90	1.00	0.95	1.05	0.90	0.90
Archisonic 24mm with 200mm air cavity	0.55	0.85	0.90	0.90	1.00	1.05	0.95	0.90
Archisonic 24mm with 300mm air cavity	0.70	0.85	0.85	0.95	1.00	1.05	0.95	0.90

**Sound Absorption Coefficient (as) according to EN ISO 354**  
Universität Stuttgart – Institut für Akustik und Bauphysik IABP

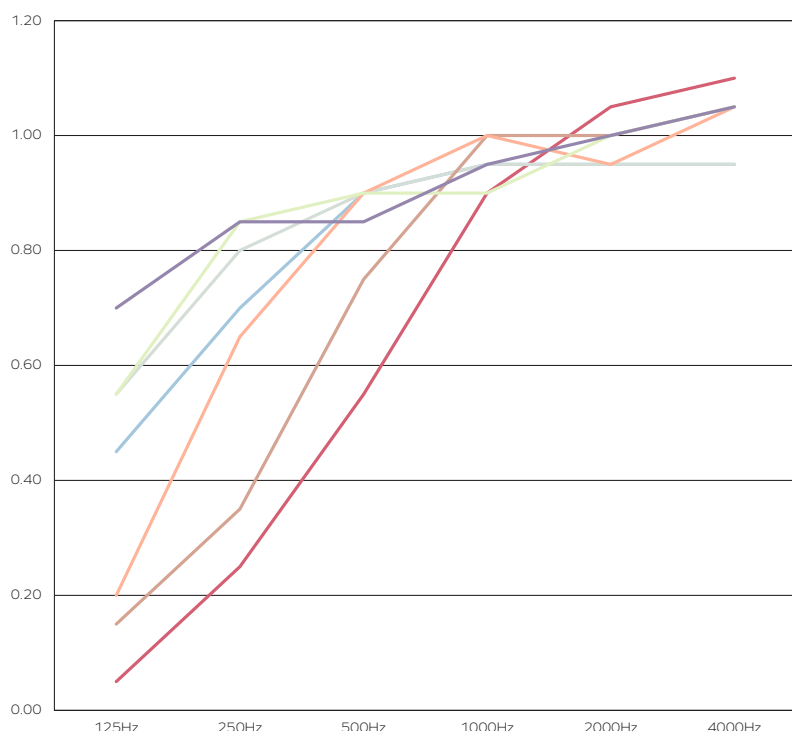

***“It’s all about mass, depth and density when considering wall panels, the more surface you cover the more you can absorb. It’s not recommended to hang a wall panel on your colleague and turn him into a walking billboard as he won’t absorb your sense of humour.”***

– Daniel Verlooven,  
Global Acoustic Ambassador

- Archisonic 24mm
- Archisonic 24mm with 50mm insulation
- Archisonic 24mm with 100mm air cavity
- Archisonic 24mm with 300mm air cavity
- Archisonic 24mm with 40mm insulation
- Archisonic 24mm with 50mm air cavity
- Archisonic 24mm with 200mm air cavity

The graph represents the sound absorption coefficients (as) in the third octave band center frequencies. Measurement used Pink Noise as excitation signal in a reverberant room.


# Fon Wall Covering

## Acoustic Technical Specifications

### Fon Wall Covering 12mm

Frequency (Hz)	125	250	500	1000	2000	4000	aw	NRC
Archisonic 12mm	0.05	0.05	0.25	0.55	0.85	1.05	0.30	0.45
Archisonic 12mm with 40mm insulation	0.30	0.55	0.75	0.90	0.95	0.95	0.75	0.80
Archisonic 12mm with 50mm insulation	0.40	0.65	0.85	0.95	0.95	0.95	0.80	0.85
Archisonic 12mm with 50mm air cavity	0.05	0.15	0.40	0.70	0.80	0.75	0.50	0.50

**Sound Absorption Coefficient ( $\alpha_s$ ) according to EN ISO 354**  
Universität Stuttgart – Institut für Akustik und Bauphysik IABP

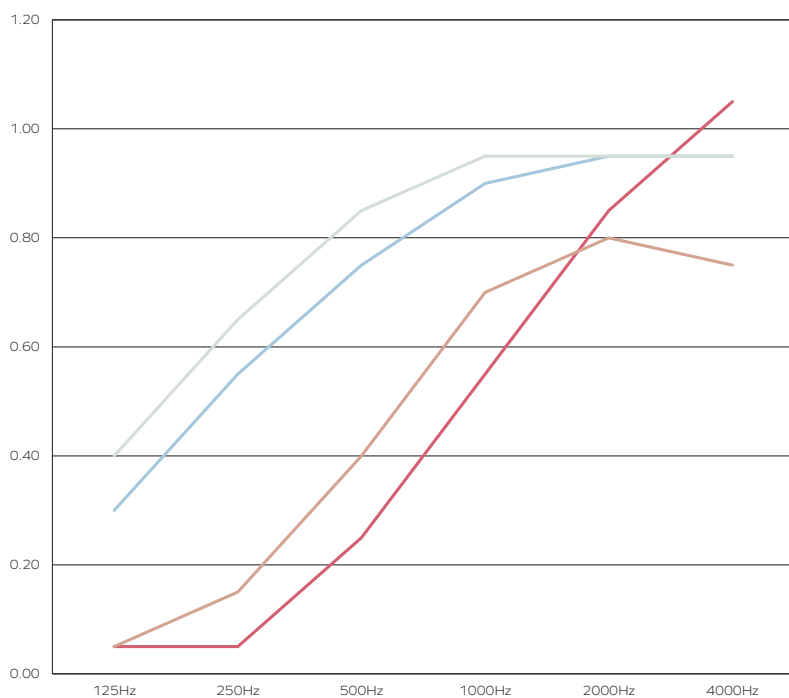

***“It’s all about mass, depth and density when considering wall panels, the more surface you cover the more you can absorb. It’s not recommended to hang a wall panel on your colleague and turn him into a walking billboard as he won’t absorb your sense of humour.”***

– Daniel Verlooven,  
Global Acoustic Ambassador

- Archisonic 12mm
- Archisonic 12mm with 50mm insulation
- Archisonic 12mm with 40mm insulation
- Archisonic 12mm with 50mm air cavity


The graph represents the sound absorption coefficients ( $\alpha_s$ ) in the third octave band center frequencies. Measurement used Pink Noise as excitation signal in a reverberant room.

# ARCHISONIC® Colours

## Quiet Neutrals

12mm & 24 mm

These shades work in harmony with natural textural materials and soften industrial environments. From light to dark and cool to warm, these are the foundations of any scheme where longevity and a mood of calm is desired.

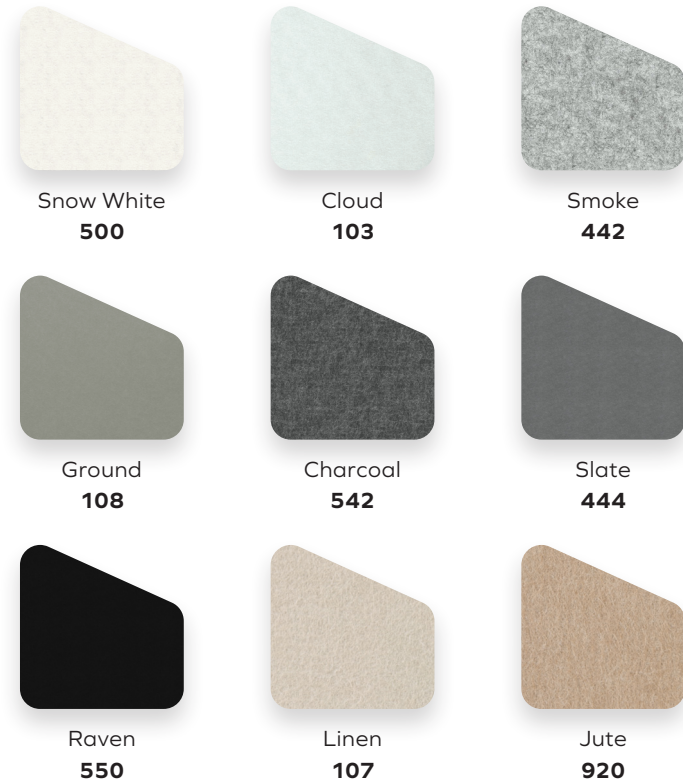

## Warm Naturals

12mm & 24 mm

Combinations of lighter toned neutrals and pinks have a gently soothing and restorative effect while the more saturated hues make perfect environments for relaxation.



# ARCHISONIC® Colours

## Living Greens

12mm & 24 mm


From the cool greens of forests to the yellowed aspect of young wheat, we see Living Greens breathing life into indoor spaces, and an essential palette for the future. Use in tonal layers brings the depth and diversity of green, while a single note can provide an amplifying backdrop to a biophilic space.



## Elemental Blues

12mm & 24 mm

These blues work perfectly both as familiar single hues and in effortless tonal layers to create an immersive environment for focus or restoration.

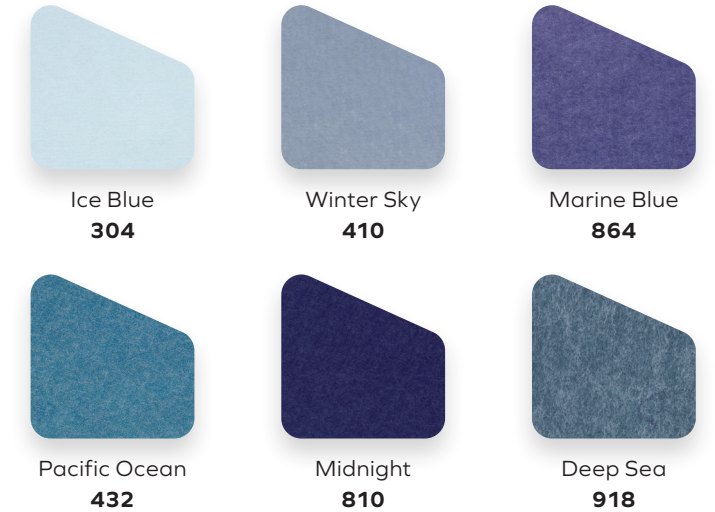



# ARCHISONIC® Colours

## Soothing Pastels

12mm & 24 mm

With tonal duos of pink and blue and green, this perfectly balanced group is designed for peaceful plays on light and shade and playful contrast. While the lightest tones have a dreamlike quality, their deeper counterparts add a subtle grounding.



Shell Pink  
102



Soft Coral  
516



Ice Blue  
304



Winter Sky  
410



Spearmint  
706



Succulent  
712

## Elegant Darks

12mm & 24 mm

While colour can create a mood, it is the depth or lightness of a hue that truly defines the emotion. While each hue has the strength to stand alone, beautiful effects can be achieved with harmonized pairs.



Garnet  
724



Marine Blue  
864



Midnight  
810



Nordic Pine  
311



Raven  
550

# ARCHISONIC® Colours

## Energetic Brights

12mm & 24 mm

There are no rules here with endless possibilities for clashing contrasts or surprising highlights. For a sophisticated use of energetic colour, take a single hue and colour match contrasting textiles and solid surfaces.



Pacific Ocean  
432



Moss  
439



Sunshine  
846



Electric Orange  
464



Hot Pink  
140

## Primary Play

12mm & 24 mm

The primary story happens when all three main colours are used together, with varied proportions creating differing moods. As with the Energetic Brights palette, combine with coordinating-coloured textiles and solid surfaces.



Snow White  
500



Charcoal  
542



Sunshine  
846



Poster Red  
662



Marine Blue  
864

# ARCHISONIC® Material

## Composition

100% PET (60% certified post-consumer content)

## Material Reutilisation

**24mm**

88 PET bottles/m<sup>2</sup>

**12mm**

53 PET bottles/m<sup>2</sup>

## Density

**24mm**

4000 g/m<sup>2</sup> (+/-10%)

**12mm**

2400 g/m<sup>2</sup> (+/-10%)

## Dimensions Raw Panels

**24mm**

1800 x 2400 x 24mm

70" x 94" x 0.94" (+/-7%)

**12mm**

1200 x 2800 x 12mm

47" x 110" x 0.47" (+/-7%)

## Fire Test

**B-s1, d0**

DIN EN 13501-1

**Class A**

ASTM E84

## VOC Emission

**A+**

28 Days French Regulation

**Pass**

14 Days CDPH/EHLB



## Care Instructions

PET fibres do not provide a breeding ground for bacteria and other germs. The dyed-through fibres do not bleach out even when using aggressive cleaning agents and disinfectants. Alcohols, aldehydes or active chlorine can be used for cleaning.

For daily cleaning we recommend alcohol solution (75%), e.g. Pantasept. In case of contamination by dust or fluff, use feather duster or a regular vacuum cleaner. For heavy dirt, treat the material with hydrogen peroxide.

**IMPACT ACOUSTIC®** Bodenhof 4, 6014 Luzern (Switzerland)

# Declare.

**ARCHISONIC®  
Impact Acoustic AG**

**Final Assembly:** Lucerne, Switzerland

**Life Expectancy:** 30 Year(s)

**End of Life Options:** Salvageable/Reusable in its Entirety, Take Back Program, Recyclable (98.5%)

**Ingredients:**

**PET:** Polyethylene Terephthalate; **Phosphorus flame retardant:** Phosphorus; **N, N'-Ethylene bis(stearamide):** Octadecanamide, N,N'-1,2-ethanedilylbis-; **Stearic acid:** Stearic Acid; **Titanium dioxide:** Titanium dioxide

**Living Building Challenge Criteria:** Compliant

**I-13 Red List:**

LBC Red List Free % Disclosed: 100% at 100ppm  
 LBC Red List Approved VOC Content: Not Applicable  
 Declared

**I-10 Interior Performance:** CDPH Standard Method v1.2-2017

**I-14 Responsible Sourcing:** Not Applicable

IMA-0001  
EXP. 01 AUG 2023  
Original Issue Date: 2022

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY  
INTERNATIONAL LIVING FUTURE INSTITUTE™ [living-future.org/declare](http://living-future.org/declare)



**HABITAT  
MATTER**

[habitatmatter.com](http://habitatmatter.com)  
[spec@habitatmatter.com](mailto:spec@habitatmatter.com)



# ARCHISONIC®

## Material

### Matching NCS Colour Codes

Developed by Colour Hive

Quiet Neutrals	500	103	442	108	542	444	550
NCS Code	<b>S 0300-N</b>	<b>S 1002-B</b>	<b>S 3005-R80B</b>	<b>S 5005-Y20R</b>	<b>S 7502-B</b>	<b>S 4500-N</b>	<b>S 8500-N</b>
Warm Naturals	105	404	102	516	239	724	
NCS Code	<b>S 3010-Y50R</b>	<b>S 0502-Y</b>	<b>S 0510-R30B</b>	<b>S 2020-Y90R</b>	<b>S 4040-Y70R</b>	<b>S 5040-R10B</b>	
Living Greens	706	712	439	311	317		
NCS Code	<b>S 1010-B90G</b>	<b>S 3020-B30G</b>	<b>S 2040-G40Y</b>	<b>S 5030-G10Y</b>	<b>S 7020-G30Y</b>		
Elemental Blues	304	410	864	432	810		
NCS Code	<b>S 0510-B</b>	<b>S 2020-R90B</b>	<b>S 4050-R70B</b>	<b>S 3040-B</b>	<b>S 7020-R70B</b>		
Soothing Pastels	102	516	304	410	706	712	
NCS Code	<b>S 0510-R30B</b>	<b>S 2020-Y90R</b>	<b>S 0510-B</b>	<b>S 2020-R90B</b>	<b>S 1010-B90G</b>	<b>S 3020-B30G</b>	
Elegant Darks	724	846	810	311	550		
NCS Code	<b>S 5040-R10B</b>	<b>S 4050-R70B</b>	<b>S 7020-R70B</b>	<b>S 5030-G10Y</b>	<b>S 8500-N</b>		
Energetic Brights	432	439	846	464	140	540	
NCS Code	<b>S 3040-B</b>	<b>S 2040-G40Y</b>	<b>S 1040-Y10R</b>	<b>S 0580-Y70R</b>	<b>S 2060-R20B</b>	<b>S 5040-R40B</b>	
Primary Play	500	542	846	662	864		
NCS Code	<b>S 0300-N</b>	<b>S 7502-B</b>	<b>S 1040-Y10R</b>	<b>S 1080-R</b>	<b>S 4050-R70B</b>		

These NCS codes are the closest visual match available and may not be exact to blended fibres.

### Colour fastness

#### Class 6

ISO 105-B02:A1

### Colour and surface deviation

ARCHISONIC® is manufactured to the highest quality standards, but slight colour and surface variations caused by the high percentage of recycled fibers are an unavoidable part of the product characteristics and do not claim warranty. Please request a free sample box to verify the colours.



# ARCHISONIC® Material

## Light Reflection

Hochschule Luzern – Institut für Gebäudetechnik | Energie

**HSLU** Hochschule  
Luzern

Quiet Neutrals	500	103	442	108	542	444	550
Reflectance p	<b>61.9%</b>	<b>51.4%</b>	<b>34.6%</b>	<b>22.5%</b>	<b>6% 1</b>	<b>7.9%</b>	<b>2.6%</b>
Warm Naturals	105	404	102	516	239	724	
Reflectance p	<b>27.5%</b>	<b>59.3%</b>	<b>55.2%</b>	<b>34.1%</b>	<b>10.3%</b>	<b>4.1%</b>	
Living Greens	706	712	439	311	317		
Reflectance p	<b>51.7%</b>	<b>27.7%</b>	<b>33.2%</b>	<b>10.3%</b>	<b>9.6%</b>		
Elemental Blues	304	410	864	432	810		
Reflectance p	<b>60%</b>	<b>32%</b>	<b>9.5%</b>	<b>15.2%</b>	<b>3.7%</b>		
Soothing Pastels	102	516	304	410	706	712	
Reflectance p	<b>55.2%</b>	<b>34.1%</b>	<b>60%</b>	<b>32%</b>	<b>51.7%</b>	<b>27.7%</b>	
Elegant Darks	724	846	810	311	550		
Reflectance p	<b>4.1%</b>	<b>9.7%</b>	<b>3.7%</b>	<b>10.3%</b>	<b>2.6%</b>		
Energetic Brights	432	439	846	464	140	540	
Reflectance p	<b>15.2%</b>	<b>33.2%</b>	<b>44.3%</b>	<b>26.8%</b>	<b>12.2%</b>	<b>5.5%</b>	
Primary Play	500	542	846	662	864		
Reflectance p	<b>61.9%</b>	<b>6%</b>	<b>44.3%</b>	<b>12.5%</b>	<b>9.5%</b>		

## Sustainability



MINIMUM 60% RECYCLED CONTENT  
POST-CONSUMER

Supported by



Climate-KIC is supported by the  
EIT, a body of the European Union

**IMPACT ACOUSTIC®** Bodenhof 4, 6014 Luzern (Switzerland)



**HABITAT  
MATTER**

habitatmatter.com  
spec@habitatmatter.com

# #We Make An Impact



HABITAT  
MATTER

habitatmatter.com  
spec@habitatmatter.com

connect@impactacoustic.com | www.impactacoustic.swiss