IMPACT ACOUSTIC®

HABITAT MATTER
habitatmatter.com
spec@habitatmatter.com

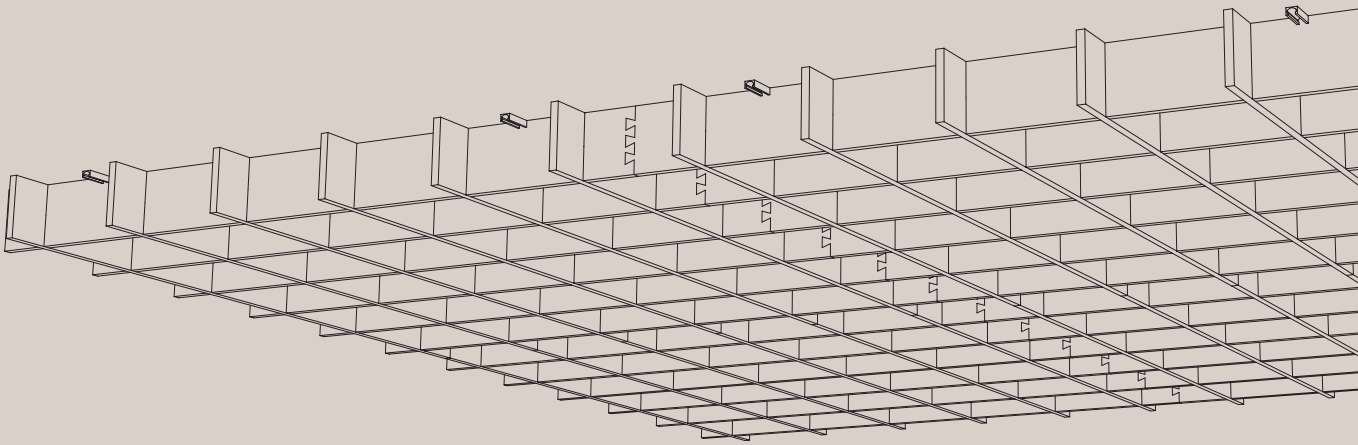

Bespoke
Grid Ceiling Systems

715.24.24.000.00
715.24.26.000.00
715.24.24.000.10
715.24.26.000.10

TECHNICAL DATA SHEET

HABITAT MATTER
habitatmatter.com
spec@habitatmatter.com

Bespoke Grid Ceiling
General Information

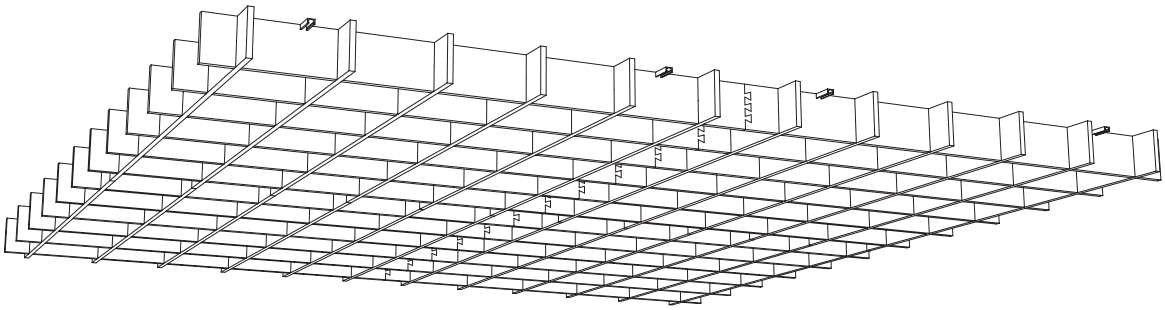

Data

Applicable article numbers

715.24.24.000.00	715.24.24.000.10
715.24.26.000.00	715.24.26.000.10

Dimensions[1]

Height	200mm	7.87"
Grid Spacing	400mm or 600mm	15.75" or 23.62"
Material thickness	24mm	0.94"
Area	on demand	on demand

Custom solutions available

1 - all Imperial dimentions are nominal

Material

Grid	100% PET (60% post-consumer) in 32 colors.
Strut profiles	Steel (galvanized or powder coated black)

Extended document available

Weight[2]

PET material	4kg/m^2 (±10%)	0.82 lbs/ft^2 (±10%)
Strut profile	0.62kg/m	0.99 lbs/ft

2 - all weight values are nominal

Included

Grid Panels



Suspension system



Installation guide



Design revision



Warranty 2 years[3]



1 - all dimentions are nominal 2 - all weight values are nominal 3 - Impact Acoustic warranty terms apply

HABITAT MATTER
habitatmatter.com
spec@habitatmatter.com

Bespoke Grid Ceiling
Specification Guide

Ensure you make the perfect choice by choosing our solutions for your next project. To get started, simply define some basic information and constraints about your space. Then explore our range of standard solutions or contact us directly for a more in-depth discussion of personalised customized options.

1 Prepare this information:



Project Area



Ceiling Plans (RCP)

page 8



Other Considerations

page 8

2 Specify your Baffles:



Height

page 4



Spacing

page 4



Color

page 10

3 Select installation method:



Strut track

page 7



Direct Gripper

page 8

Bespoke Grid Ceiling
Geometry Information

Custom solutions available

Reference geometry

Explore the various standard and custom sizes in our product families. See the drawing below for an overview of basic dimensions, modules and ranges.

Customize our **Bespoke** products beyond the presented values - contact us for details.

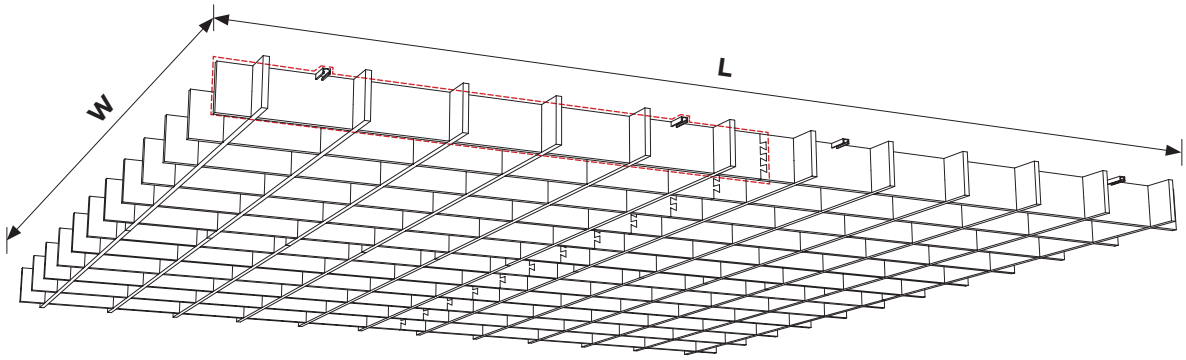

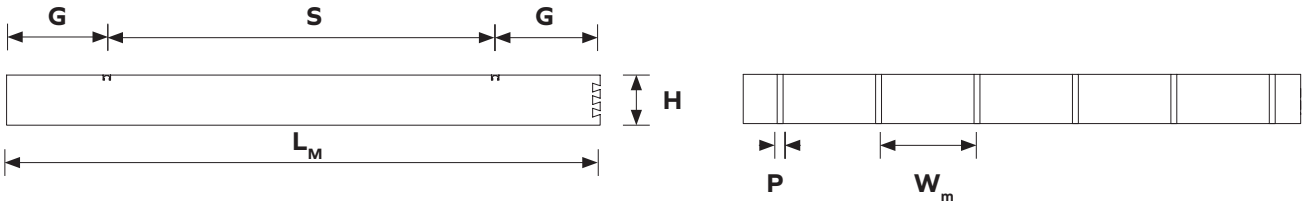

Dimensions table

W	Total width	on demand	on demand	*bespoke*
L	Total length	on demand	on demand	*bespoke*
W_m	Spacing	400 or 600mm	15.75" or 23.62"	*standard or bespoke*
L_m	Length module	1600-2400mm	63''-94.5"	*standard*
G	Overhang	400mm	15.75"	*standard*
S	Support spacing	max.1600	max.63"	*standard*
H	Baffle height	200mm	7.87"	*standard or bespoke*
P	PET material thickness	24mm	0.94""	*fixed*

HABITAT MATTER
habitatmatter.com
spec@habitatmatter.com

HABITAT MATTER
habitatmatter.com
spec@habitatmatter.com

Bespoke Grid Ceiling
Product Family Overview

1 Bespoke Grid Ceiling 400x400 (Strut Mount)

Customizable product

715.24.24.000.00 - Bespoke Grid Ceiling (H200, S400) (H7.87", S15.75")

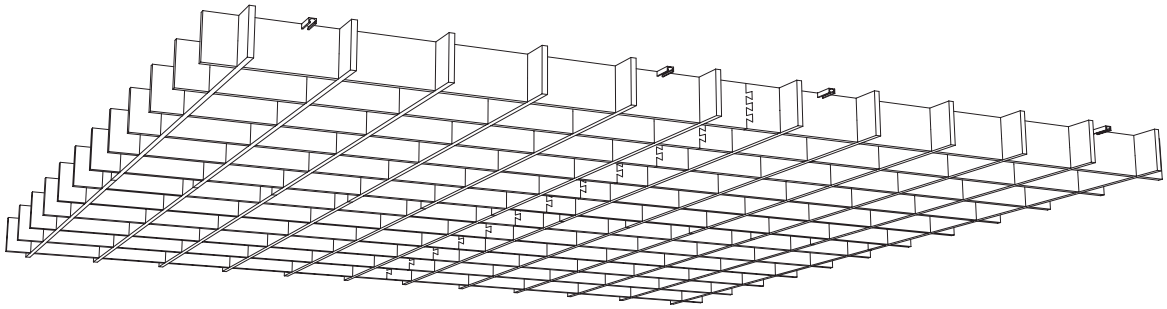

2 Bespoke Grid Ceiling 600x600 (Strut Mount)

Customizable product

715.24.26.000.00 - Bespoke Grid Ceiling (H200, S600) (H7.87", S23.62")

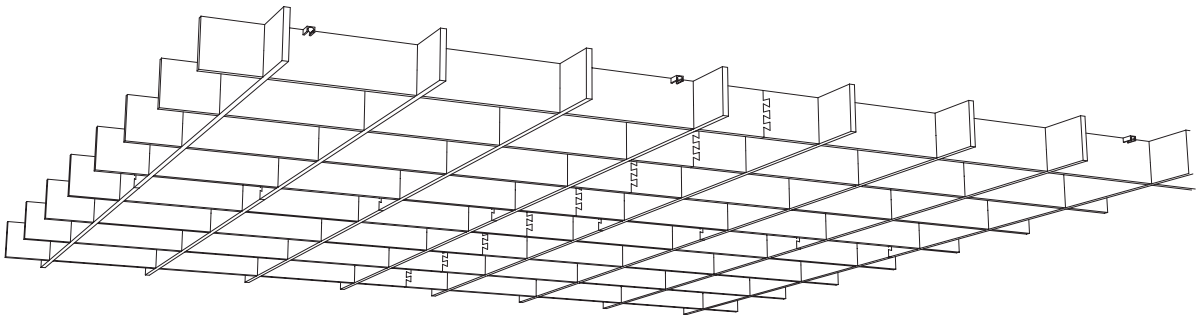

HABITAT
MATTER
habitatmatter.com
spec@habitatmatter.com

Bespoke Grid Ceiling
Product Family Overview

1 Bespoke Grid Ceiling 400x400 (Gripper Mount)

Customizable product

715.24.24.000.10 - Bespoke Grid Ceiling (H200, S400) (H7.87", S15.75")

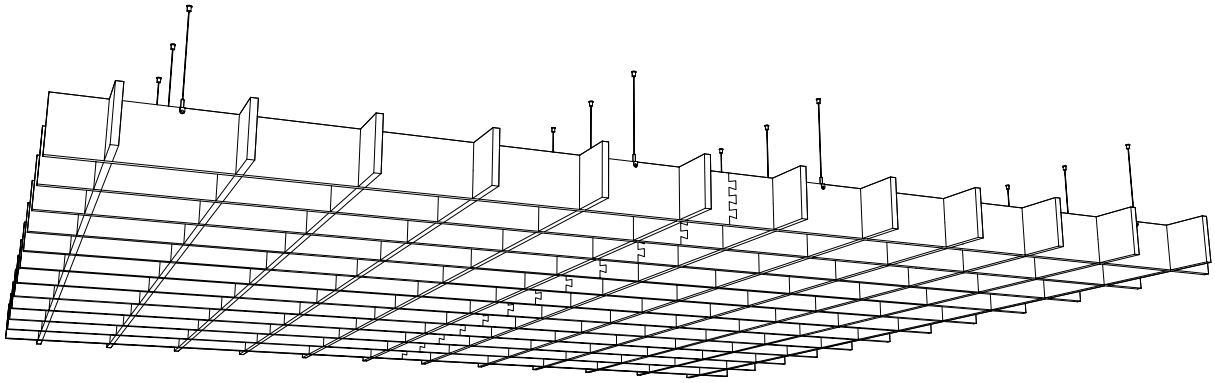

2 Bespoke Grid Ceiling 600x600 (Gripper Mount)

Customizable product

715.24.26.000.10 - Bespoke Grid Ceiling (H200, S600) (H7.87", S23.62")

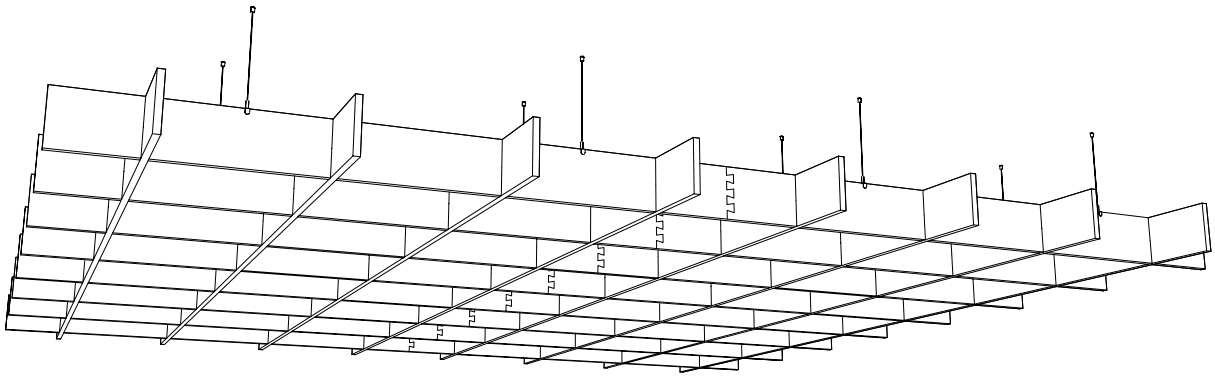

Bespoke Grid Ceiling
Installation Overview

Extended document available

1 Verify and organize

Verify all delivered elements and organize them based on the included labeling of each part and the supplied drawings.

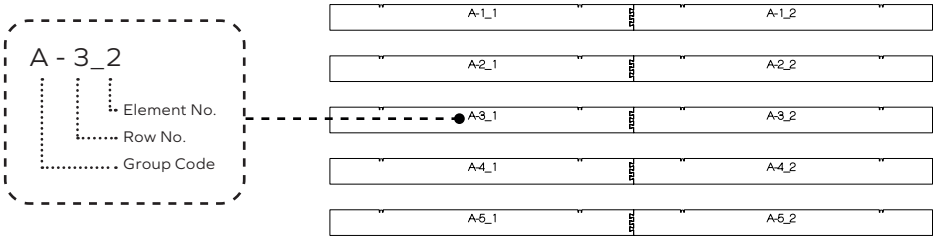

2 Install mounting hardware

Measure, mark and fix suspension hardware to your ceiling.



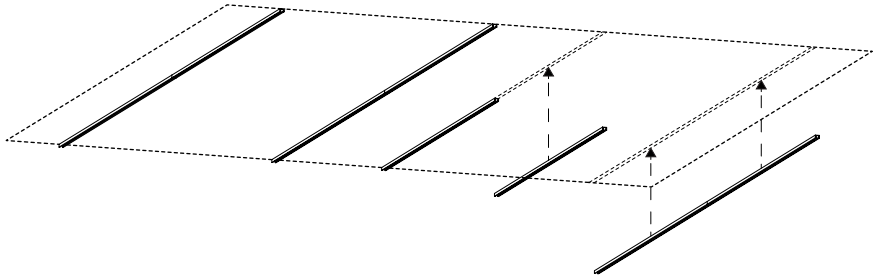

3 Install upper segments

Fix segments to mounting hardware and connect them together using the dovetail joints.

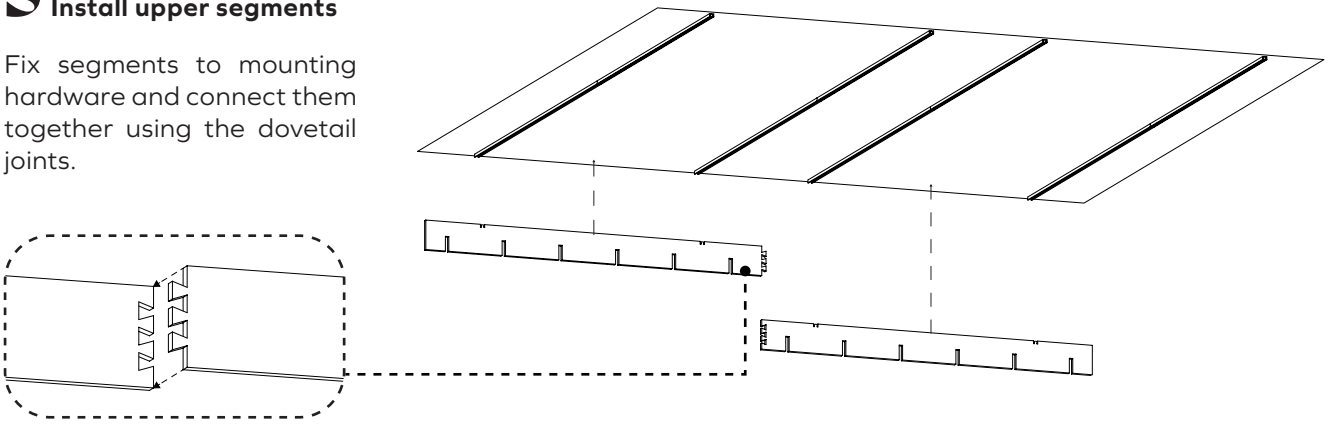

4 Instal lower segments

Slot in lower segments into previously installed upper segments in perpendicular direction and connect dovetails.



HABITAT MATTER
habitatmatter.com
spec@habitatmatter.com

Bespoke Grid Ceiling
Installation Overview

Extended document available

1 Verify and organize

Verify all delivered elements and organize them based on the included labeling of each part and the supplied drawings.

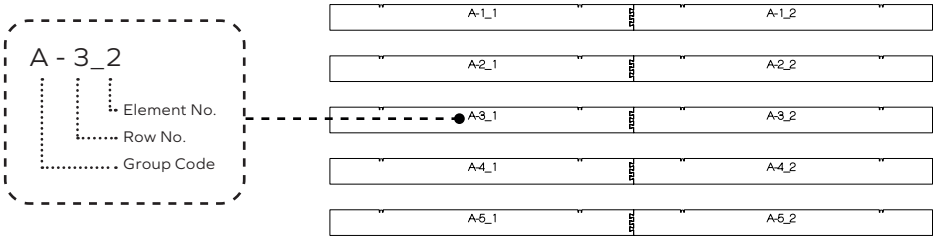

2 Install mounting hardware

Measure, mark and fix suspension hardware to your ceiling.



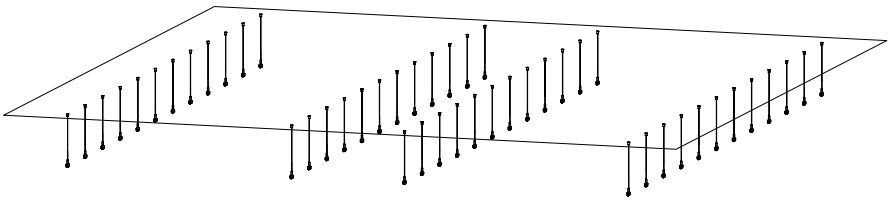

3 Install upper segments

Fix segments to mounting hardware and connect them together using the dovetail joints.

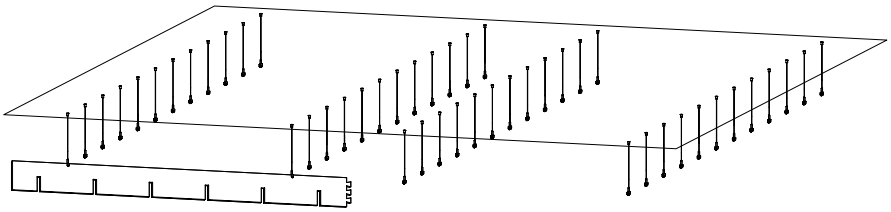

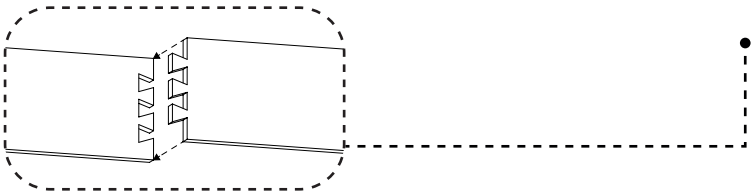

4 Instal lower segments

Slot in lower segments into previously installed upper segments in perpendicular direction and connect dovetails.

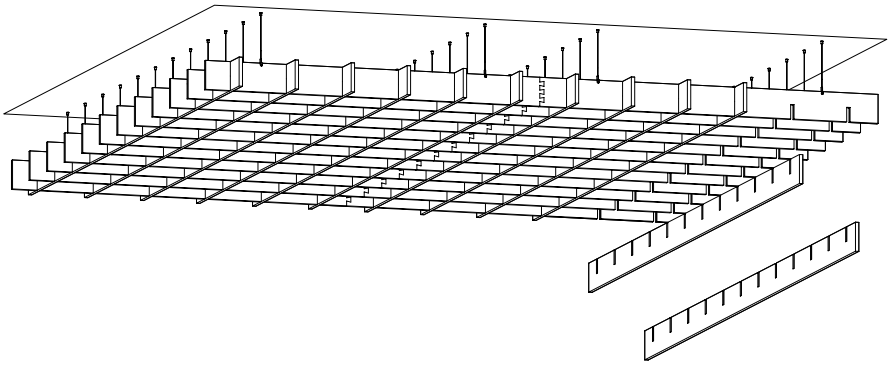

HABITAT MATTER
habitatmatter.com
spec@habitatmatter.com

HABITAT MATTER
habitatmatter.com
spec@habitatmatter.com

Bespoke Grid Ceiling
Optional Infill Cells

The rectangular cells in our Bespoke Grid Ceiling System can be optionally closed from the top side with additional piece of PET material with or without integrated spot light. The distribution and percentage of enclosed cells as well as the abount of light spots can be cutomized on request.

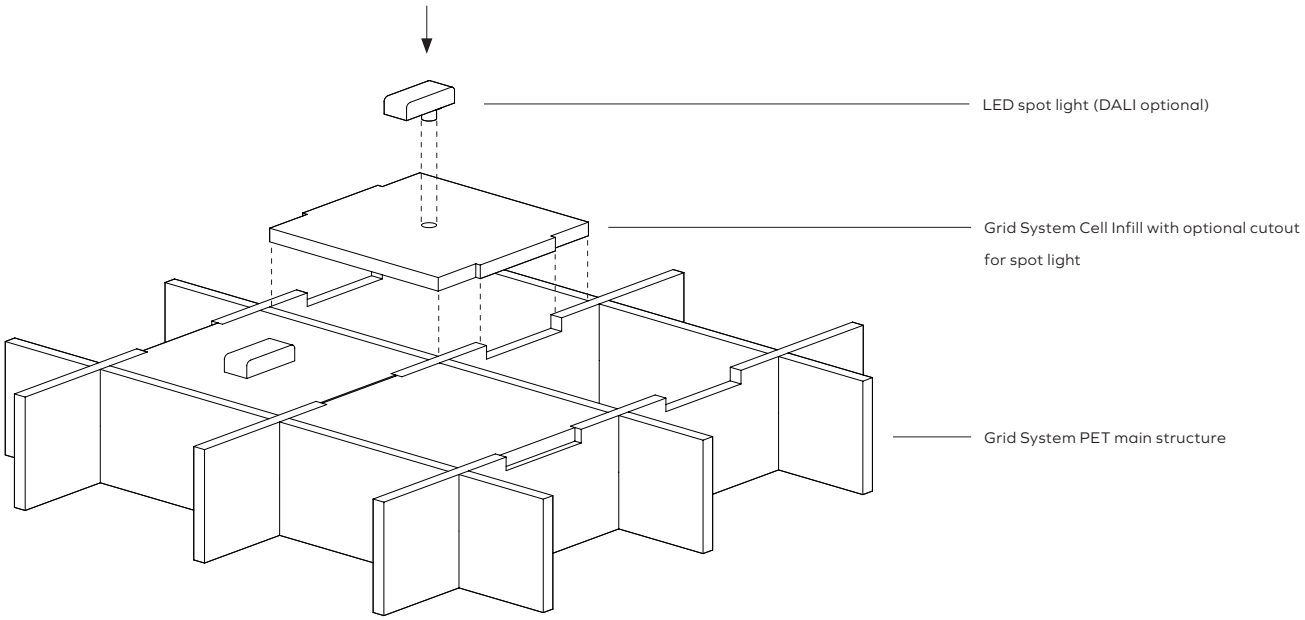

LIGHTING SPECIFICATIONS

	per spot light
Output	Direct Only
Total Lumen Output (lm)	328
Wattage	6.5
Efficacy (lm/W)	50.5
Diffuser	Microprism
Beam Angle	34
CCT	2700-3000-3500-4000K
CRI	90+
MacAdam	3
Dimming (optional)	0-10V 0.1% DSI/DALI
Driver Location	On-Board

LIGHT DISTRIBUTION GRAPH

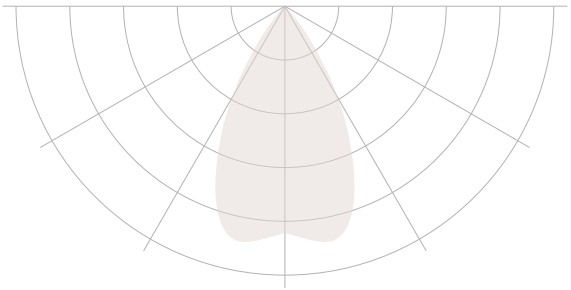

CERTIFICATIONS

Bespoke Grid Ceiling
Planning Considerations

Extended document available

When planning the addition of a Bespoke Ceiling Baffle System to your space, please consider the following aspects.

1 Project Area

Check and verify the project area where the Ceiling Grid System will be installed. This will allow us to provide you with an accurate quote.

2 Reverse Ceiling Plans

Verify if RCP drawings for the space are available. This will help plan for any obstacles like columns and air-ducts that might collide with the Grid elements.

3 Additional considerations

Consider access to high windows and doors.

Verify the type of material to which the support elements will be mounted.

Plan for providing min. 100mm (4") safe space distance from Grid to other elements

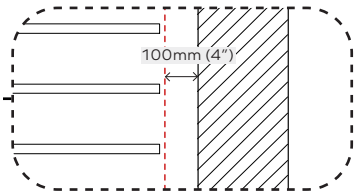

Consider possible cutouts for the air ductsv and columns..

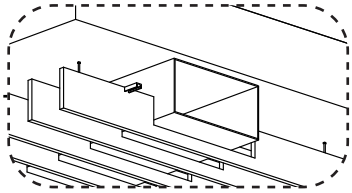

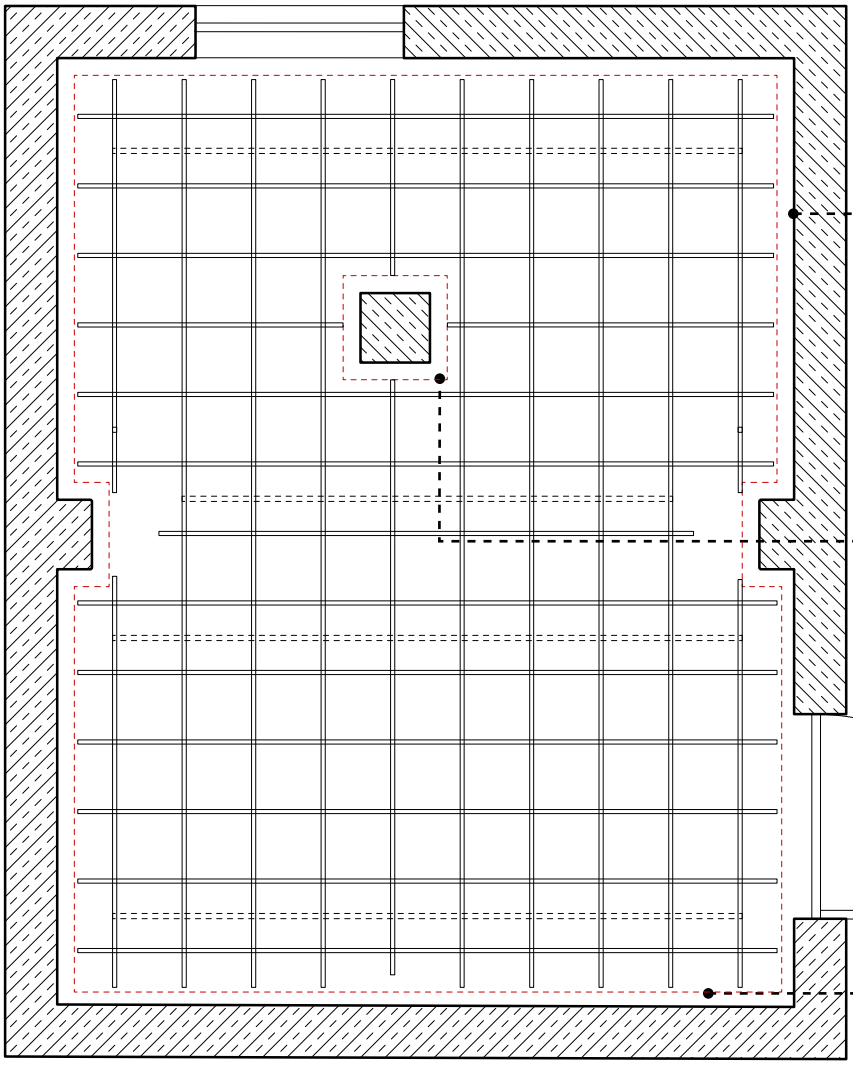

RCP drawing example

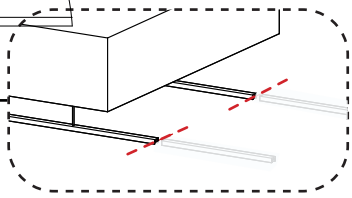

The provided strut tracks might need to be cut to measure on site.

HABITAT MATTER
habitatmatter.com
spec@habitatmatter.com

ARCHISONIC®
Colours

HABITAT MATTER
habitatmatter.com
samples@habitatmatter.com

Name	Snow White	Cloud	Smoke	Slate	Charcoal	Raven	Ground	Gull	Milk
Code	**500**	**103**	**442**	**444**	**542**	**550**	**108**	**144**	**404**
NCS	S 0300-N	S 1002-B	S 3005-R80B	S 4500-N	S 7502-B	S 8500-N	S 5005-Y20R	S2502-Y	S 0502-Y

Name	Linen	Dune	Jute	Fallow	Warm Stone	Truffle	Sunshine	Honeycomb	Electric Orange
Code	**107**	**104**	**920**	**238**	**105**	**539**	**846**	**139**	**464**
NCS	S 1505-Y30R	S 2005-Y	S 3010-Y30R	S 5010-Y30R	S 3010-Y50R	S 8502-R	S 1040-Y10R	S 2050-Y20R	S 0580-Y70R

Name	Terracotta	Soft Coral	Cinnabar	Shell Pink	Garnet	Poster Red	Hot Pink	Grape	Marine Blue
Code	**239**	**516**	**725**	**102**	**724**	**662**	**140**	**540**	**864**
NCS	S 4040-Y70R	S 2020-Y90R	S 6030-R	S 0510-R30B	S 5040-R10B	S 1080-R	S 2060-R20B	**S 5040-R40B**	S 4050-R70B

Name	Midnight	Royal Blue	Winter Sky	Deep Sea	Nocturne	True Navy	Ice Blue	Pacific Ocean	Lagoon
Code	**810**	**865**	**410**	**918**	**866**	**194**	**304**	**432**	**917**
NCS	S 7020-R70B	S 3560-R80B	S 2020-R90 B	S 5020-R90B	S 8010-R90B	S8005-B	S 0510-B	S 3040-B	S 7020-B30G

Name	Succulent	Spearmint	Seafoam	Nordic Pine	Moss	Grove	Pistachio	Lichen	Fern
Code	**712**	**706**	**710**	**311**	**439**	**317**	**315**	**160**	**180**
NCS	S 3020-B30G	S 1010-B90G	S 3010-G30Y	S 5030-G10Y	S 2040-G40Y	S 7020-G30Y	S 5020-Y	**S4005-Y**	S6010-G90Y

These NCS codes are the closest visual match available and may not be exact to blended fibres.

ARCHISONIC®

Colours

Experience our ARCHISONIC® Felt material with a stunning selection of 45 colours across 9 distinct families, thoughtfully curated by *Colour Hive* in London. Effortlessly combine colours harmoniously to suit your preferences. Discover more in our Materials brochure and order your free sample box today.

Colour fastness

Class 6

ISO 105-B02:A1

Order a free sample box



HABITAT MATTER
habitatmatter.com
spec@habitatmatter.com

ARCHISONIC®
Material Specification

Product Name	Archisonic® Felt	
Content	100% PET (60% certified post-consumer content)	
Thickness[1]	12mm (0.47")	24mm (0.94")
Max. Size	1200x2800mm (47"x110")	1800x2400mm (70"x94")
Acoustic[2]	**ASTM:** NRC=0.6 **ISO**: αw=0.65	**ASTM**: NRC=0.9 **ISO**: αw=0.95
Density[1]	2400 g/m² (0.49 lbs/ sqft)	4000 g/m² (0.82 lbs/sqft)
Color Fastness	**Class 6** ISO 105-B02:A1	
Color	**32 colors** (see Archisonic® Felt Color page for more information)	
Maintenance	For daily cleaning we recommend alcohol solution (75%), e.g. Pantasept. In case of contamination by dust or fluff, use feather duster or a regular vacuum cleaner. For heavy dirt, treat the material with hydrogen peroxide.	
Lead time[3]	21 days	
Fire Rating	DIN EN 13501-1: **B-s1, d0**	ASTM E84 **Class A**
VOC Emission	**A+** 28 Days French Regulation	ASTM E84 **Pass**
Certifications	Declare label, Cradle to Cradle, UL Environmental Product Declaration, Member of US Green Building Council, Ecobau 1st Priority, Climmate-KIC, VOC emissions in LEED EQ credit (low-emitting products), Breeam, SCS Recycled Content	
Durability	Contract	

1 - all values are nominal 2 - measured with 300mm air cavity 3 - depending on the location and type of product

Climate-KIC is supported by the EIT, a body of the European Union

MINIMUM 60% RECYCLED CONTENT POST-CONSUMER

HABITAT MATTER
habitatmatter.com
spec@habitatmatter.com

Bespoke Grid Ceiling
Acoustic Performance

University of Stuttgart
Germany

Testing Standards

ISO 354:2003	Acoustics — Measurement of sound absorption in a reverberation room
ISO 11654:1997	Acoustics — Sound absorbers for use in buildings — Rating of sound absorption
ISO 20189:2018	Acoustics — Screens, furniture and single objects intended for interior use — Rating of sound absorption and sound reduction of elements based on laboratory measurements
ASTM C423-17	Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
ASTM E795-16	Standard Practices for Mounting Test Specimens During Sound Absorption Tests

Sound Absorption Coefficient (αp)

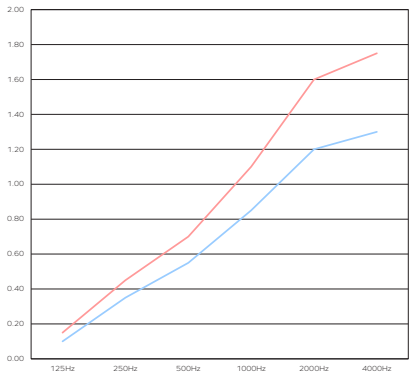

Frequency (Hz)	125	250	500	1000	2000	4000
200mm height, 400mm spacing	0.15	0.45	0.70	1.10	1.60	1.75
200mm height, 600mm spacing	0.10	0.35	0.55	0.85	1.20	1.30

200mm height, 600mm spacing
200mm height, 400mm spacing

ISO - Equivalent Sound Absorption Area (m2)

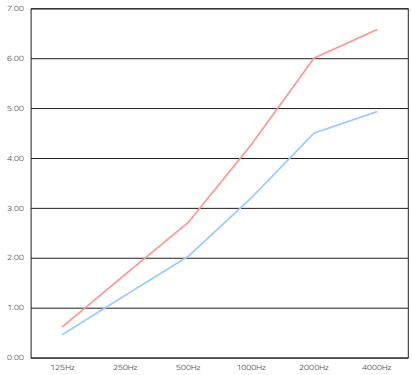

Frequency (Hz)	125	250	500	1000	2000	4000
200mm height, 400mm spacing	0.6	1.7	2.7	4.3	6.0	6.6
200mm height, 600mm spacing	0.5	1.3	2.0	3.2	4.5	4.9

200mm height, 600mm spacing
200mm height, 400mm spacing

ASTM - Equivalent Sound Absorption Area (Sabins)

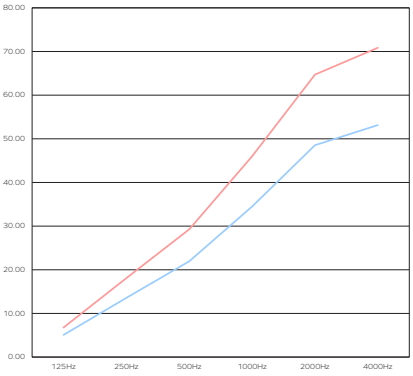

Frequency (Hz)	125	250	500	1000	2000	4000
200mm height, 400mm spacing	6.8	18.1	29.3	46.0	64.7	70.9
200mm height, 600mm spacing	5.1	13.6	22.0	34.5	48.5	53.1

200mm height, 600mm spacing
200mm height, 400mm spacing