
IMPACT ACOUSTIC®

HABITAT MATTER
habitatmatter.com
spec@habitatmatter.com

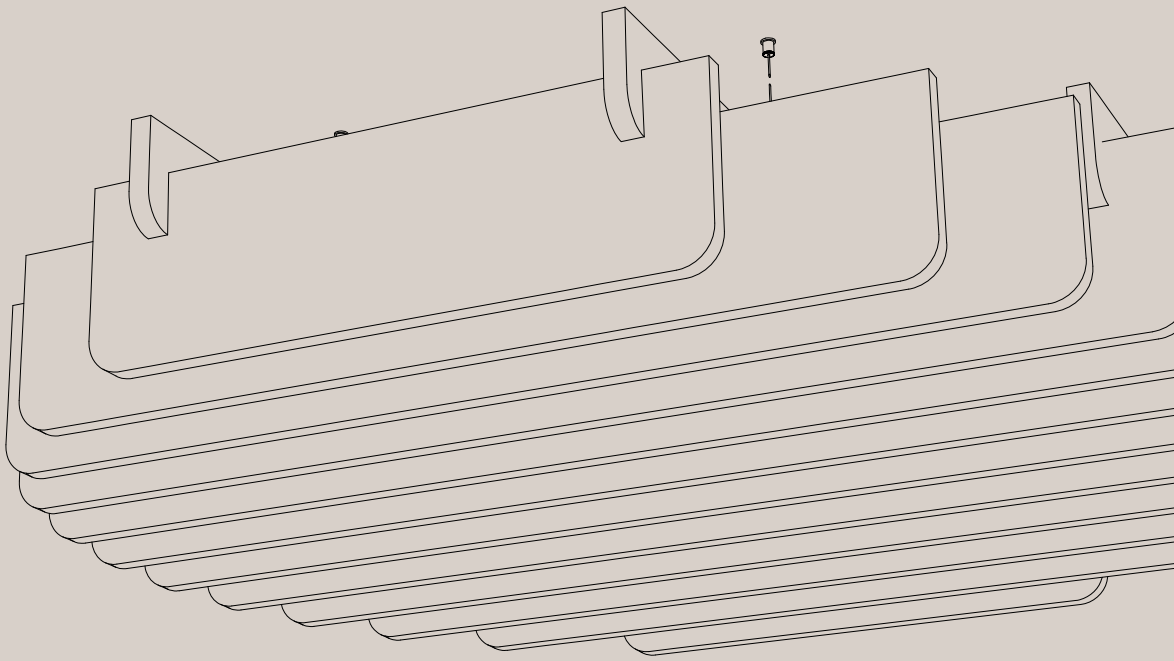

Nebula
Modular Baffle

712.24.14.000.00
712.24.15.000.00

TECHNICAL DATA SHEET

HABITAT MATTER
habitatmatter.com
spec@habitatmatter.com

Nebula Modular Baffle
General Information



Data

Applicable article numbers

712.24.14.000.00	712.24.15.000.00

Dimensions[1]

Width	1100 or 1476mm	43.3" or 58.11"
Length	1060 or 1535mm	41.73" or 60.43"
Material thickness	24mm	0.94"
Total Height	285 and 262mm	on demand

Custom solutions available

Material

Baffles	100% PET (60% post-consumer) in 32 colors.
Gripper system	Stainless steel

Extended document available

Weight[2]

712.24.14.000.00	7.68 kg (±10%)	16.93 lbs (±10%)	*(without suspension)*
712.24.15.000.00	14.52 kg (±10%)	32.01 lbs (±10%)	*(without suspension)*

Included

Baffle Module	Cable-Gripper Suspention	Installation guide	Warranty 2 years[3]


1 - all dimentions are nominal 2 - all weight values are nominal 3 - Impact Acoustic warranty terms apply

HABITAT MATTER
habitatmatter.com
spec@habitatmatter.com


Nebula Modular Baffle
Specification Guide

Ensure you make the perfect choice by choosing our solutions for your next project. To get started, simply define some basic information and constraints about your space. Then explore our range of standard solutions or contact us directly for a more in-depth discussion of personalised customized options.

1 Prepare this information:




Ceiling Plans (RCP)




Ceiling Type

2 Specify your Baffles:




Size

page 5 and 6



Number of Modules


page 4



Color

page 8

3 Verify installation method:



Gripper + Slotted Baffle


page 7

HABITAT
MATTER
habitatmatter.com
spec@habitatmatter.com

Nebula Modular Baffle
Product Family Overview

1 Nebula Modular Baffle Small


712.24.14.000.00 - Ceiling Baffle Nebula Modular

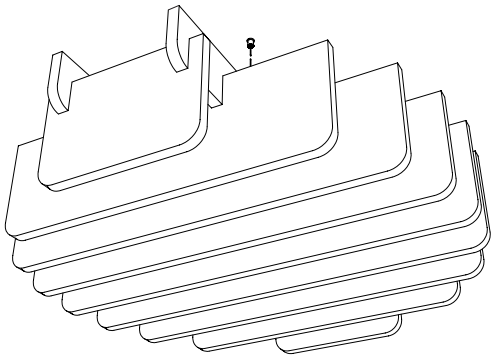

(W1100 L1060, H285)
(W43.31" L41.73" H11.22")

2 Nebula Modular Baffle Big

712.24.15.000.00 - Ceiling Baffle Nebula Modular

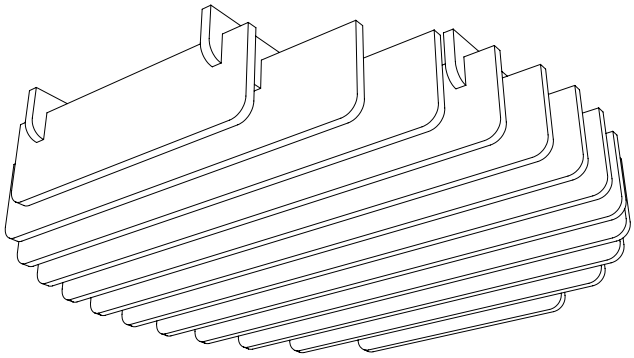



(W1476 L1535, H262)
(W58.11" L60.43", H10.32")


Nebula Modular Baffle
Geometry Information

Custom solutions available

Ceiling Baffle Nebula Modular 712.24.14.000.00

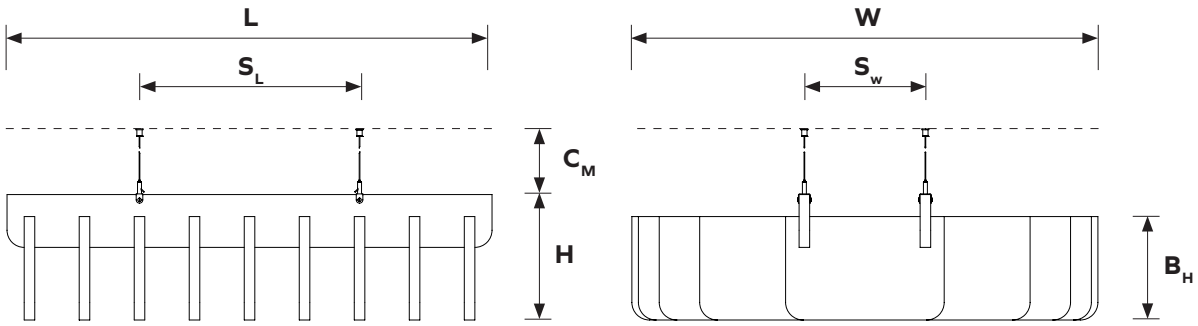

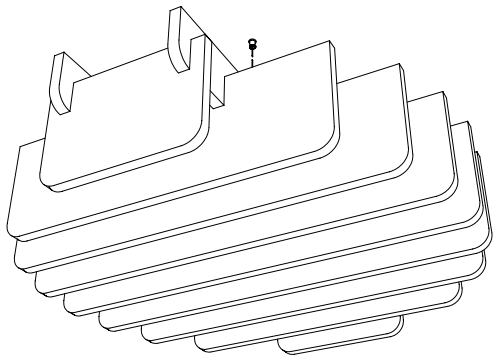

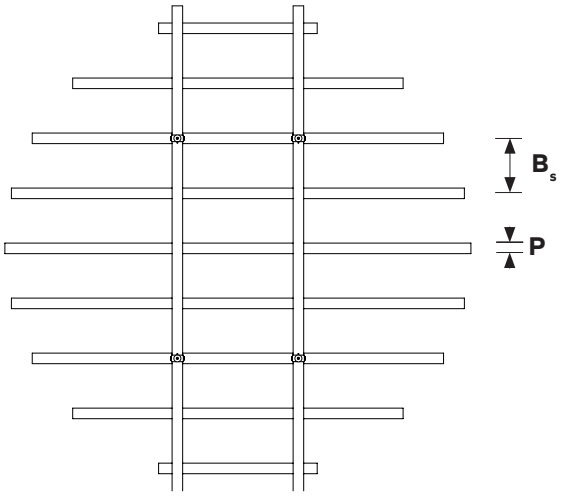

Dimensions table


W	Total width	1100mm	43.3″
L	Total length	1060mm	41.73″
H	Total height	285mm	11.22″
B_H	Bottom baffle height	235mm	9.25″
B_S	Baffle spacing	125mm	4.92″
C_M	Min. distance from ceiling	min. 100mm	min. 4″
S_W	Support spacing W	500mm	19.68″
S_L	Support spacing L	275mm	10.83″
P	PET material thickness	24mm	0.94″


HABITAT MATTER
habitatmatter.com
spec@habitatmatter.com


Nebula Modular Baffle
Geometry Information


Custom solutions available

Ceiling Baffle Nebula Modular 712.24.15.000.00

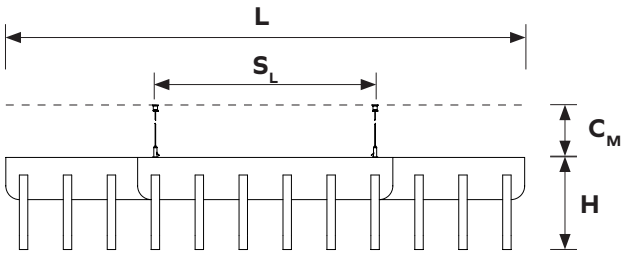

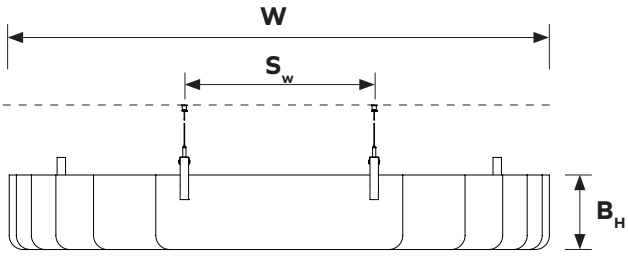

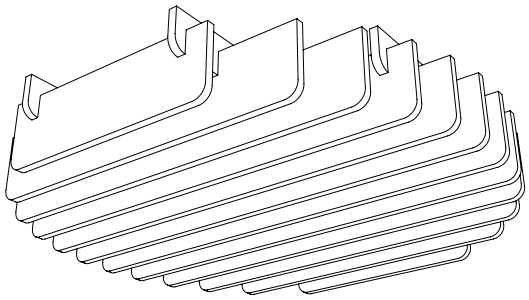

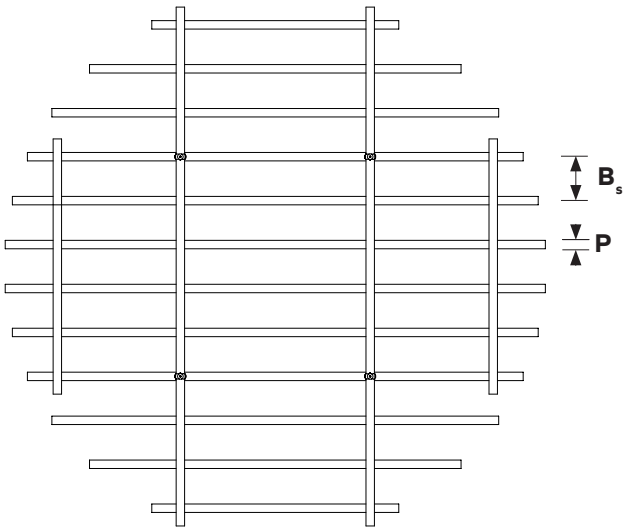

Dimensions table

W	Total width	1476mm	58.11″
L	Total length	1060mm	60.43″
H	Total height	262mm	11.22″
B_H	Bottom baffle height	235mm	10.32″
B_S	Baffle spacing	125mm	4.92″
C_M	Min. distance from ceiling	min. 100mm	min. 4″
S_W	Support spacing W	540mm	21.26″
S_L	Support spacing L	625mm	24.61″
P	PET material thickness	24mm	0.94″

HABITAT MATTER
habitatmatter.com
spec@habitatmatter.com


Nebula Modular Baffle
Installation Overview

Extended document available


1 Attach mounting hardware

Attach 4 pieces of mounting cables *(1)* to the ceiling.




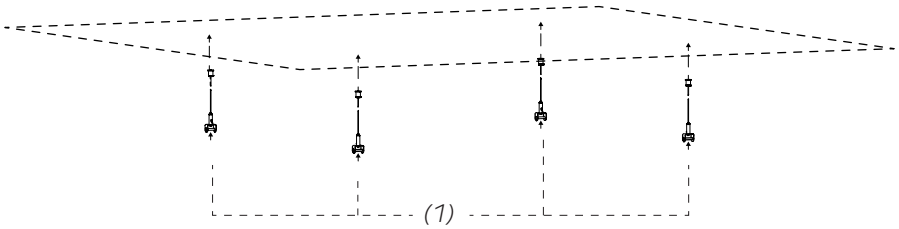

2 Install upper Baffles




Attach slotted upper baffles *(2)* to the gripper connectors. Secure the baffles with provided screws. Adjust the lift of the baffles using the cable

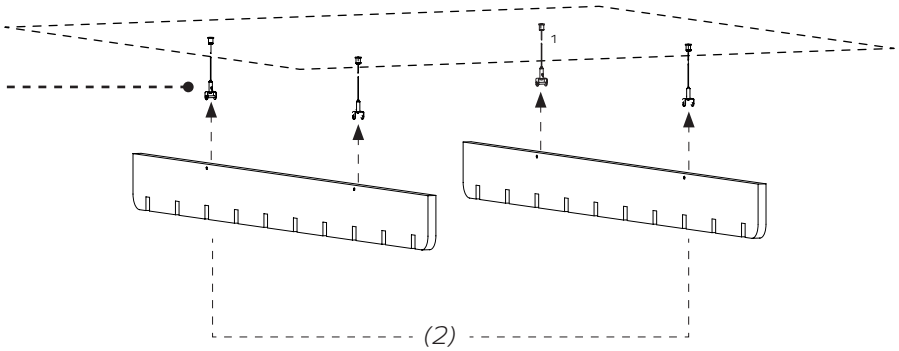

3 Install lower Baffles

Push in lower Baffles *(3)* into slots provided in a upper baffles.

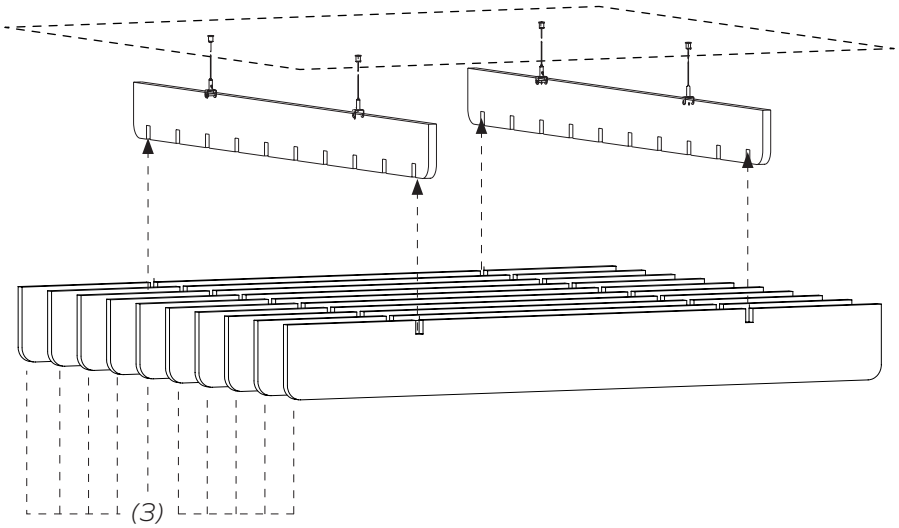

HABITAT MATTER
habitatmatter.com
spec@habitatmatter.com

ARCHISONIC®
Colours

HABITAT MATTER
habitatmatter.com
samples@habitatmatter.com

Name	Snow White	Cloud	Smoke	Slate	Charcoal	Raven	Ground	Gull	Milk
Code	**500**	**103**	**442**	**444**	**542**	**550**	**108**	**144**	**404**
NCS	S 0300-N	S 1002-B	S 3005-R80B	S 4500-N	S 7502-B	S 8500-N	S 5005-Y20R	S2502-Y	S 0502-Y

Name	Linen	Dune	Jute	Fallow	Warm Stone	Truffle	Sunshine	Honeycomb	Electric Orange
Code	**107**	**104**	**920**	**238**	**105**	**539**	**846**	**139**	**464**
NCS	S 1505-Y30R	S 2005-Y	S 3010-Y30R	S 5010-Y30R	S 3010-Y50R	S 8502-R	S 1040-Y10R	S 2050-Y20R	S 0580-Y70R

Name	Terracotta	Soft Coral	Cinnabar	Shell Pink	Garnet	Poster Red	Hot Pink	Grape	Marine Blue
Code	**239**	**516**	**725**	**102**	**724**	**662**	**140**	**540**	**864**
NCS	S 4040-Y70R	S 2020-Y90R	S 6030-R	S 0510-R30B	S 5040-R10B	S 1080-R	S 2060-R20B	**S 5040-R40B**	S 4050-R70B

Name	Midnight	Royal Blue	Winter Sky	Deep Sea	Nocturne	True Navy	Ice Blue	Pacific Ocean	Lagoon
Code	**810**	**865**	**410**	**918**	**866**	**194**	**304**	**432**	**917**
NCS	S 7020-R70B	S 3560-R80B	S 2020-R90 B	S 5020-R90B	S 8010-R90B	S8005-B	S 0510-B	S 3040-B	S 7020-B30G

Name	Succulent	Spearmint	Seafoam	Nordic Pine	Moss	Grove	Pistachio	Lichen	Fern
Code	**712**	**706**	**710**	**311**	**439**	**317**	**315**	**160**	**180**
NCS	S 3020-B30G	S 1010-B90G	S 3010-G30Y	S 5030-G10Y	S 2040-G40Y	S 7020-G30Y	S 5020-Y	**S4005-Y**	S6010-G90Y

These NCS codes are the closest visual match available and may not be exact to blended fibres.

ARCHISONIC®

Colours

Experience our ARCHISONIC® Felt material with a stunning selection of 45 colours across 9 distinct families, thoughtfully curated by *Colour Hive* in London. Effortlessly combine colours harmoniously to suit your preferences. Discover more in our Materials brochure and order your free sample box today.

Colour fastness

Class 6

ISO 105-B02:A1

Order a free sample box



ARCHISONIC®
Material Specification

Product Name	Archisonic® Felt	
Content	100% PET (60% certified post-consumer content)	
Thickness[1]	12mm (0.47")	24mm (0.94")
Max. Size	1200x2800mm (47"x110")	1800x2400mm (70"x94")
Acoustic[2]	**ASTM:** NRC=0.6 **ISO**: αw=0.65	**ASTM**: NRC=0.9 **ISO**: αw=0.95
Density[1]	2400 g/m² (0.49 lbs/ sqft)	4000 g/m² (0.82 lbs/sqft)
Color Fastness	**Class 6** ISO 105-B02:A1	
Color	**32 colors** (see Archisonic® Felt Color page for more information)	
Maintenance	For daily cleaning we recommend alcohol solution (75%), e.g. Pantasept. In case of contamination by dust or fluff, use feather duster or a regular vacuum cleaner. For heavy dirt, treat the material with hydrogen peroxide.	
Lead time[3]	21 days	
Fire Rating	DIN EN 13501-1: **B-s1, d0**	ASTM E84 **Class A**
VOC Emission	**A+** 28 Days French Regulation	ASTM E84 **Pass**
Certifications	Declare label, Cradle to Cradle, UL Environmental Product Declaration, Member of US Green Building Council, Ecobau 1st Priority, Climmate-KIC, VOC emissions in LEED EQ credit (low-emitting products), Breeam, SCS Recycled Content	
Durability	Contract	

1 - all values are nominal 2 - measured with 300mm air cavity 3 - depending on the location and type of product

Climate-KIC is supported by the EIT, a body of the European Union

HABITAT MATTER
habitatmatter.com
spec@habitatmatter.com

Nebula Modular Baffle
Acoustic Performance

Testing Standards

University of Stuttgart
Germany

ISO 354:2003	Acoustics — Measurement of sound absorption in a reverberation room
ISO 11654:1997	Acoustics — Sound absorbers for use in buildings — Rating of sound absorption
ISO 20189:2018	Acoustics — Screens, furniture and single objects intended for interior use — Rating of sound absorption and sound reduction of elements based on laboratory measurements
ASTM C423-17	Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
ASTM E795-16	Standard Practices for Mounting Test Specimens During Sound Absorption Tests


Acoustic Test Results ISO

Frequency (Hz)		**125**	**250**	**500**	**1000**	**2000**	**4000**
Ceiling Baffle Standard Module 24mm	m^2	0.9	2.5	4.1	6.4	9.0	9.9

Acoustic Test Results ASTM (Sabins)

Frequency (Hz)		**125**	**250**	**500**	**1000**	**2000**	**4000**
Ceiling Baffle Standard Module 24mm	m^2	10.1	27.1	43.9	69.0	97.1	106.3

Presented results apply to tested module of 300mm height straight baffles with 200mm spacing in between.

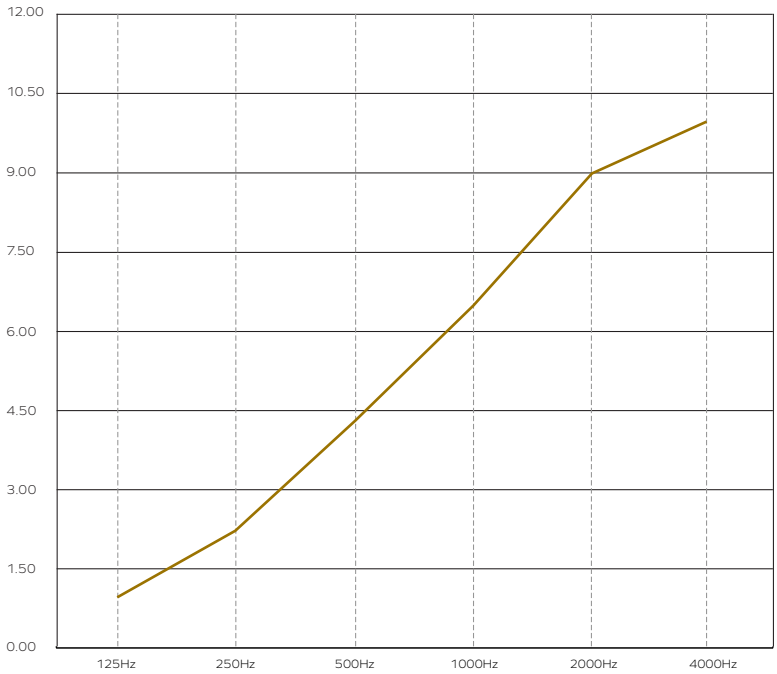

"If you want to control room acoustics from the ceiling, keep one important principle in mind: size matters."

– Daniel Verlooven,
Global Acoustic Ambassador

● Ceiling Baffle Standard Module 24mm

The graph represents the sound absorption coefficients (αs) in the third octave band center frequencies. Measurement used Pink Noise as excitation signal in a reverberant room.

HABITAT MATTER
habitatmatter.com
spec@habitatmatter.com

HABITAT
MATTER
habitatmatter.com
spec@habitatmatter.com

Modular Baffle

Reference Projects







